



**AQUA 2 (AQ-60011) (Version 1)****Product description**

Without remote box IP-rated - With remote driver /  
recessing box - Constant current (CC) 1050 mA

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in PVC is included
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

**Optic****Product colour**


00 - Stainless Steel

**AQUA 2** (AQ-60011) (Version 1)

**Technical information**

<b>Material</b>	Stainless Steel	<b>Optic</b>	M, W, VW	<b>Product colours</b>	Stainless Steel
<b>Light source</b>	1 COB	<b>Optic value</b>	26°, 43°, 60°	<b>Weight</b>	2.2 kg
<b>Power</b>	21 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lumen</b>	1555 - 1648 lm	<b>Bug</b>	B1-U0-G0, B2-U0-G0	<b>Cable</b>	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
<b>Efficacy</b>	74 - 78 lm/W	<b>ULR</b>	0%	<b>Through wiring</b>	Single cable entry
<b>Driver option</b>	Remote driver (included)	<b>ULOR</b>	0%	<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>Driver</b>	Constant current (CC)	<b>CIE flux code n°3</b>	100		
<b>Input voltage</b>	1050 mA, 18 VDC	<b>Dimming type</b>	On/Off		

AQ-60011

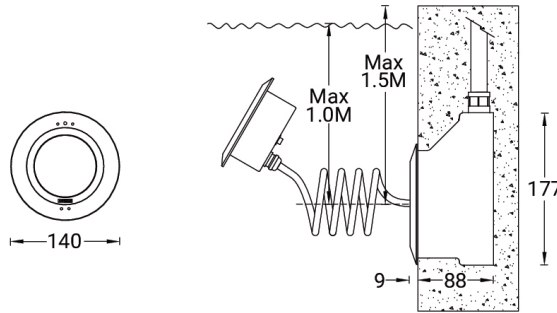

**Accessories**



Remote box IP65  
**A80191**