

## AQUA 5 (AQ-60041) (Version 1)



### Product description


Without remote driver - With recessing box - Constant voltage (CV) 24 V



### Luminaire Structure

- |  |   |   |
|--|---|---|
| <ul style="list-style-type: none"> <li>- Stainless steel body in grade 316</li> <li>- Single cable entry</li> <li>- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable</li> <li>- Stainless steel fasteners in grade 316</li> <li>- Durable silicone rubber gasket</li> </ul> | <ul style="list-style-type: none"> <li>- Clear toughened glass</li> <li>- Remote driver (not included)</li> <li>- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products</li> <li>- Recessing box in PVC is included</li> <li>- Luminaire must be submerged when operational</li> </ul> | <ul style="list-style-type: none"> <li>- Maximum depth 2 m</li> <li>- Outdoor cable needs to be ordered with a specific length</li> </ul> |
|--|---|---|

### Optic



### Product colour



## AQUA 5 (AQ-60041) (Version 1)


### Technical information

<b>Material</b>	Stainless Steel
<b>Light source</b>	1 COB
<b>Power</b>	18 W
<b>Lumen</b>	1343 - 1498 lm
<b>Efficacy</b>	75 - 83 lm/W
<b>Driver option</b>	Remote driver (not included)
<b>Driver</b>	Constant voltage (CV)
<b>Input voltage</b>	24 VDC
<b>Optic</b>	M, W, VW

<b>Optic value</b>	28°, 44°, 72°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B1-U0-G0
<b>ULR</b>	0%
<b>ULOR</b>	0%
<b>CIE flux code n°3</b>	100
<b>Dimming type</b>	On/Off
<b>Product colours</b>	Stainless Steel
<b>Weight</b>	1.2 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 60,500
<b>Lifetime L80B10 (hours)</b>	> 60,500
<b>Lifetime L80B50 (hours)</b>	> 60,500

### AQ-60041

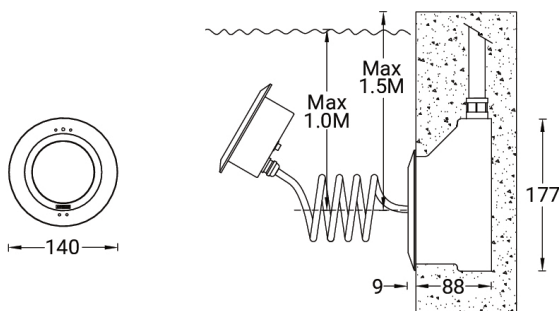

### Accessories



Driver (CV) - On/Off - 36 W - IP67 - 24 V  
**A34491-ND**



Driver (CV) - On/Off - 60 W - IP67 - 24 V  
**A34591-ND**



Driver (CV) - On/Off - 100 W - IP67 - 24 V  
**A34791-ND**



Driver (CV) - On/Off - 150 W - IP67 - 24 V  
**A34891-ND**



Driver (CV) - On/Off - 200 W - IP67 - 24 V  
**A34991-ND**



Driver (CV) - On/Off - 350 W - IP67 - 24 V  
**A35091-ND**