


AQUA 5 (AQ-60041) (Version 1)**Product description**

Without remote driver - With recessing box - Constant voltage (CV) 24 V

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (not included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in PVC is included
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length

Optic**Product colour**


00 - Stainless Steel

AQUA 5 (AQ-60041) (Version 1)

Technical information

Material	Stainless Steel	Optic value	28°, 44°, 72°	Operating temperature	-20 °C to 40 °C
Light source	1 COB	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
Power	18 W	Bug	B1-U0-G0	Through wiring	Single cable entry
Lumen	1343 - 1498 lm	ULR	0%	Lens / Reflector / Optic	Clear toughened glass
Efficacy	75 - 83 lm/W	ULOR	0%	MacAdam Ellipse	3 SDCM
Driver option	Remote driver (not included)	CIE flux code n°3	100	Lifetime L90B10 (hours)	> 60,500
Driver	Constant voltage (CV)	Dimming type	On/Off	Lifetime L80B10 (hours)	> 60,500
Input voltage	24 VDC	Product colours	Stainless Steel	Lifetime L80B50 (hours)	> 60,500
Optic	M, W, VW	Weight	1.2 kg		

AQ-60041

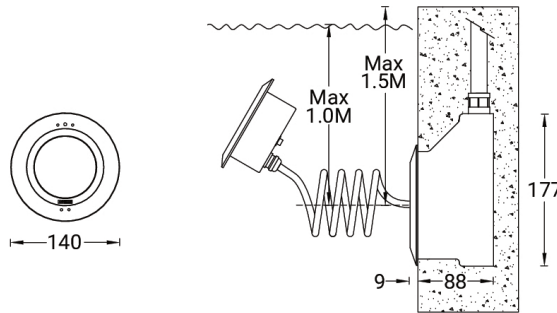

Accessories



Driver (CV) - On/Off - 36 W - IP67 - 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W - IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W - IP67 - 24 V
A35091-ND