

AQUA 6 (AQ-60051) (Version 2)



Product description

Without remote driver - With recessing box - Constant voltage (CV) 24 V



Luminaire Structure

- | | | |
|--|---|---|
| <ul style="list-style-type: none"> - Stainless steel body in grade 316 - Single cable entry - One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable - Stainless steel fasteners in grade 316 - Durable silicone rubber gasket | <ul style="list-style-type: none"> - Clear toughened glass - Remote driver (not included) - Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products - Recessing box in PVC is included - Luminaire must be submerged when operational | <ul style="list-style-type: none"> - Maximum depth 2 m - Outdoor cable needs to be ordered with a specific length |
|--|---|---|

Optic



AS

Product colour



00 - Stainless Steel

AQUA 6 (AQ-60051) (Version 2)


Technical information

Material	Stainless Steel
Light source	1 COB
Power	27 W
Lumen	2043 - 2151 lm
Efficacy	76 - 80 lm/W
Driver option	Remote driver (not included)
Driver	Constant voltage (CV)
Input voltage	24 VDC
Optic	AS

Optic value	41°x31°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	On/Off
Product colours	Stainless Steel
Weight	3.8 kg

Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 60,500
Lifetime L80B10 (hours)	> 60,500
Lifetime L80B50 (hours)	> 60,500

AQ-60051

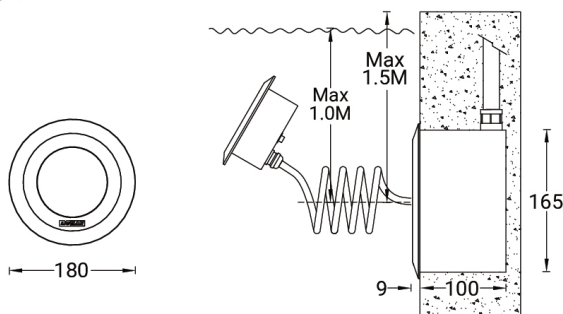

Accessories



Driver (CV) - On/Off - 36 W - IP67 - 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67 - 24 V
A34591-ND



Driver (CV) - On/Off - 100 W - IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W - IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W - IP67 - 24 V
A34991-ND



Driver (CV) - On/Off - 350 W - IP67 - 24 V
A35091-ND