


ARIZONA 8 (AR-21161)



Product description

Ø225 mm - Supplied with specific 3.675 m cylindrical, straight aluminium lighting poles with illuminated decorative graphic: APG130225-001-RGBW (45W - DMX/DMXRDM) - IP65 - IK07

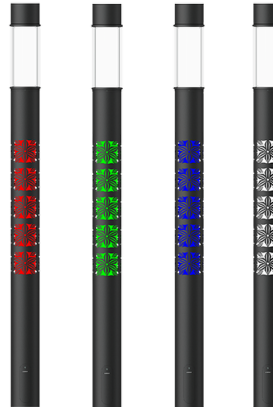


microPrim™

Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- High-efficiency PMMA lens
- Integral control gear
- Maximum wind load resistance is 140 km/h
- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.

Optic




G

Product colour

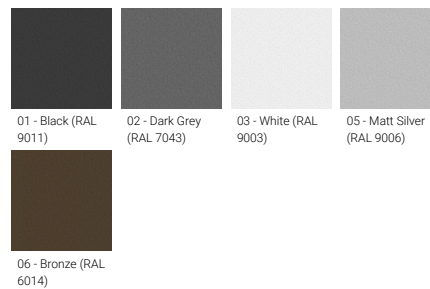

Special finishes upon request

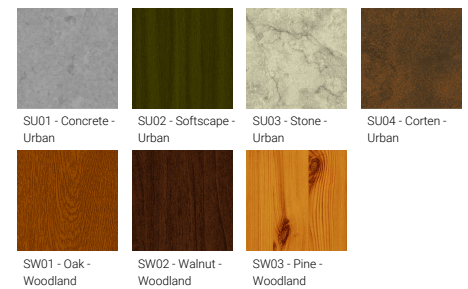


ARIZONA 8 (AR-21161)


Technical information

Material	Aluminium
Light source	1 COB, 3 x 16 LED
Power	87 W
Lumen	3419 - 3657 lm
Efficacy	39 - 42 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	G
Optic value	360°
CCT / CRI	RGBW30, RGBW40
Bug	B2-U3-G0
ULR	7%
ULOR	7%
CIE flux code n°3	99
Dimming type	DMX, DMX/RDM

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	84.8 kg
Operating temperature	-20 °C to 40 °C
EPA (m2)	0.827
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, High-efficiency PMMA lens

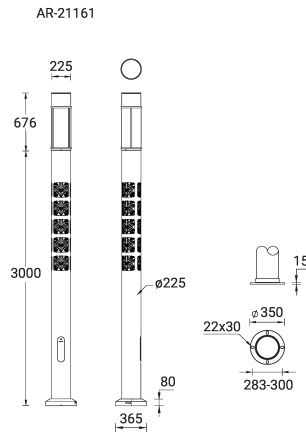

ARIZONA 8 (AR-21161)**Accessory**Circuit breaker box IP44
A21291Root mount kit
A20791Custom decorative graphic
A23291DMX Control System
Control-DMXDALI Control System
Control-DALIDMX/RDM Control System
Control-DMX-RDM**Pole (required)**Graphic 1 - RGBW - 45W - 3.675
m - Cylindrical, straight
aluminium lighting poles with
illuminated decorative graphic
for ARIZONA - DMX/DMXRDM
APG130225-001-RGBW