


ARIZONA 8 (AR-21162)



Product description

Ø225 mm - Supplied with specific 3.675 m cylindrical, straight aluminium lighting poles with illuminated decorative graphic: APG130225-001-RGBW (45W - DMX/DMXRDM) - IP65 - IK07

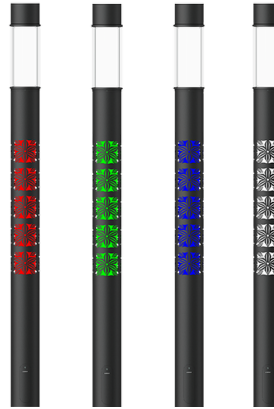


Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency optical reflector
- High-efficiency PMMA lens
- Integral control gear

- Maximum wind load resistance is 140 km/h
- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.

Optic



Product colour

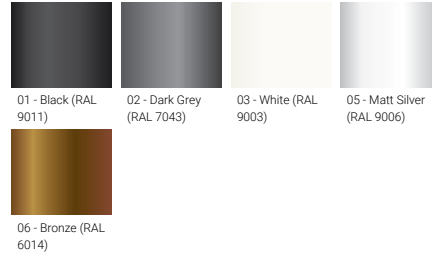


ARIZONA 8 (AR-21162)

Technical information

Material	Aluminium
Light source	16 LED, 3 x 16 LED
Power	85 W
Lumen	2911 - 3519 lm
Efficacy	34 - 41 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz

Optic	T2, T3, T4
Optic value	142°x 52°, 137°x 65°, 93°x 64°
CCT / CRI	RGBW30, RGBW40
Bug	B1-U2-G1
ULR	1%
ULOR	1%
CIE flux code n°3	97, 98
Dimming type	DMX, DMX/RDM

Product colours	Black, Dark Grey, White, Matt Silver, Bronze
Weight	84.78 kg
Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency optical reflector, High-efficiency PMMA lens

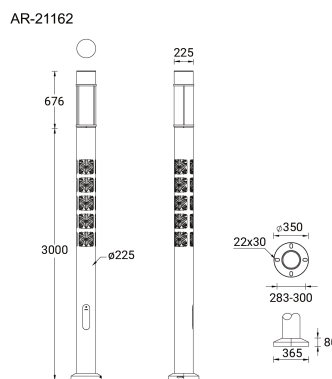

Accessories



Circuit breaker box IP44
A21291



Root mount kit
A20791



Custom decorative graphic
A23291



DMX Control System
Control-DMX



DALI Control System
Control-DALI



DMX/RDM Control System
Control-DMX-RDM