

ARIZONA 11 (AR-21191-HO)



Product description

Ø160 mm - Supplied with specific 2.5 m cylindrical, straight aluminium pole: APD125160-ARIZONA - High Output - IK06



microPrim™

Luminaire structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- High-efficiency PMMA lens
- Clear acrylic PMMA diffuser
- Integral control gear


- Maximum wind load resistance is 140 km/h
- Surge protection 10kV
- For ARIZONA 8, the luminaire and the lighting pole with illuminated decorative graphic are controlled separately. Upon request, they can be controlled together by the same protocol, either DMX or DALI.

Optic




6

Product colour

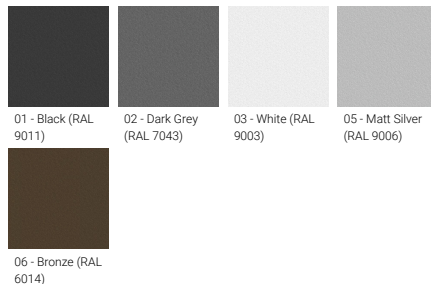

Special finishes upon request

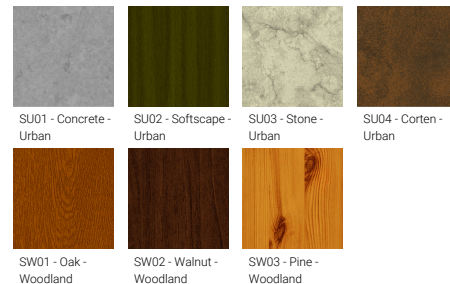

We reserve the right to make technical and design changes.

02:43, 17-10-2026

<https://www.ligman.com/arizona-11-ar-21191-ho/>

THAILAND
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Piao,
24150 Chachoengsao - Thailand
info@ligman.com




ARIZONA 11 (AR-21191-HO)

Technical information

Material	Aluminium
Light source	1 COB
Power	27 W
Lumen	3136 - 3439 lm
Efficacy	116 - 127 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	G
Optic value	133°x117°

CCT / CRI	2700K CRI80, 3000K CRI80, 4000K CRI80
Bug	B2-U1-G1, B2-U2-G1
ULR	1%
ULOR	1%
CIE flux code n°3	95
Dimming type	On/Off, 1-10V, DALI
Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	22.0 kg
Operating temperature	-20 °C to 50 °C
EPA (m2)	0.830

Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	High-efficiency PMMA lens, Clear acrylic PMMA diffuser
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 88,000
Lifetime L80B10 (hours)	> 110,000
Lifetime L80B50 (hours)	> 120,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

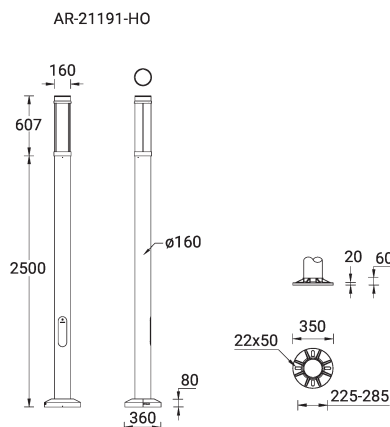

ARIZONA 11 (AR-21191-HO)

Accessory



Circuit breaker box IP44
A21291



Root mount kit
A20791



DALI Control System
Control-DALI

Pole (required)



2.5 m - Cylindrical, straight
aluminium pole for ARIZONA
APD125160-ARIZONA