

## ARDEN 4 (ARD-90025)



### Product description

Down - 480 mm - RGBW DMX



### Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control

- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Wireless control available through Bluetooth connection

- Daylight and occupancy sensor options
- Emergency module (1 or 3 hours) is available upon request with 3 options (BASIC, SELF-TEST, PRO-DALI)

### Optic




P

### Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

### Special finishes upon request



SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban




SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

## ARDEN 4 (ARD-90025)


### Technical information

<b>Material</b>	Aluminium	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	1920 LED	<b>Optic</b>	O, P	<b>Lens / Reflector / Optic</b>	PMMA diffuser with Opal (UGR <19) and micro prismatic (UGR <13) options for better glare control
<b>Power</b>	60 W	<b>Optic value</b>	108°, 93°	<b>MacAdam Ellipse</b>	3 SDCM
<b>Lumen</b>	1815 lm	<b>CCT / CRI</b>	RGBW40	<b>Lifetime L90B10 (hours)</b>	> 23,000
<b>Efficacy</b>	30 lm/W	<b>Dimming type</b>	DMX, DMX/RDM	<b>Lifetime L80B10 (hours)</b>	> 45,000
<b>Driver option</b>	Integral control gear		Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B50 (hours)</b>	> 50,000
<b>Driver</b>	Constant current (CC)	<b>Product colours</b>		<b>Variants (DMX, DMX/RDM)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
		<b>Weight</b>	4.7 kg		


ARD-90025

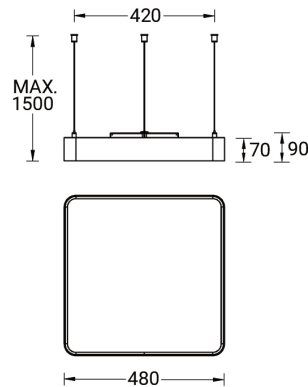


### Accessories




Supply cable surface mounting box  
**A80981**



Decorative pattern - Type A for ARDEN 300 mm  
**A91421**



Decorative pattern - Type B for ARDEN 300 mm  
**A92821**



Decorative pattern - Type C for ARDEN 300 mm  
**A94221**

**ARDEN 4** (ARD-90025)

Recessing box  
**A61051**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**