

ARGENTINA 1 (ARG-20001) (Version 1)



Product description

Top Ø742 - Supplied with a cylindrical, straight aluminium pole - Height options: 3 - 6 m



Luminaire Structure

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry

- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser


- Integral control gear
- 1 standard decorative pattern, other patterns upon request

Optic




G

Product colour

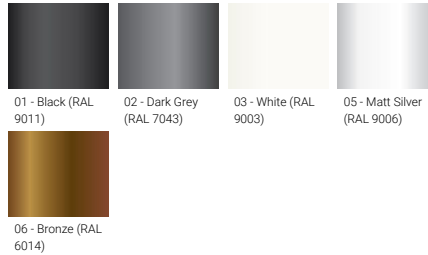

Special finishes upon request

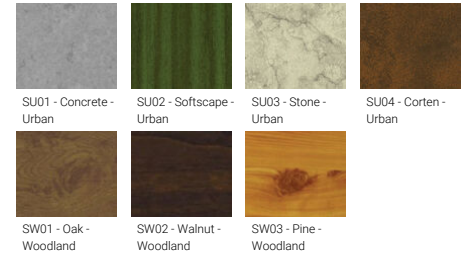


ARGENTINA 1 (ARG-20001) (Version 1)

Technical information

Material	Aluminium
Light source	624 LED
Power	109 W
Lumen	9118 - 9598 lm
Efficacy	84 - 88 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)

Input voltage	220-240V 50/60Hz
Optic	G
Optic value	360°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B3-U2-G1
CIE flux code n°3	96
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	20 kg
Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Opal UV-stabilised polycarbonate diffuser

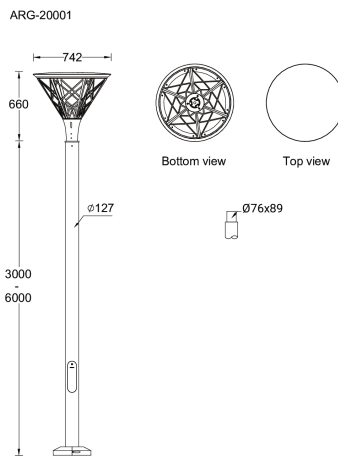

Accessories

 <p>Root mount kit A20691</p>	 <p>Circuit breaker box IP44 A21291</p>	 <p>Root mount kit A20491</p>	 <p>6 m - Cylindrical, straight aluminium pole for SYNDY, ANESTI, ARGENTINA APD160127-ASP</p>
---	---	--	---

ARGENTINA 1 (ARG-20001) (Version 1)

5 m - Cylindrical, straight
aluminium pole for SYNDY,
ANESTI, ARGENTINA
APD150127-ASP



3 m - Cylindrical, straight
aluminium pole for ARGENTINA
APD130127-ASP



4 m - Cylindrical, straight
aluminium pole for ARGENTINA
APD140127-ASP
