


ARGENTINA 1 (ARG-20002) (Version 1)**IP65****IK07****Product description**

Top Ø742 - Supplied with a cylindrical, straight aluminium pole - Height options: 3 - 6 m

**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- 1 standard decorative pattern, other patterns upon request

Optic**G****Product colour**

01 - Black (RAL 9011)


02 - Dark Grey (RAL 7043)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request

SU01 - Concrete - Urban


SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland


ARGENTINA 1 (ARG-20002) (Version 1)

Technical information





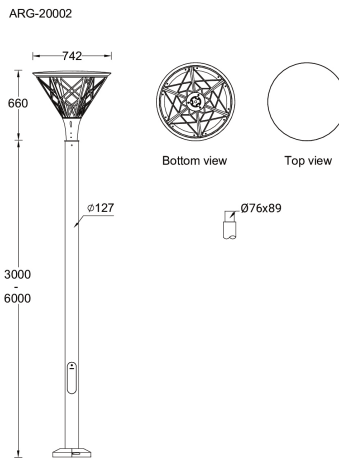


| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 1248 LED |
| Power | 183 W |
| Lumen | 19813 - 20439 lm |
| Efficacy | 108 - 112 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |

| | |
|------------------------|--|
| Input voltage | 220-240V 50/60Hz |
| Optic | G |
| Optic value | 360° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B3-U4-G3 |
| Dimming type | On/Off, 1-10V, DALI |
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |

| | |
|---------------------------------|--|
| Weight | 20 kg |
| Operating temperature | -20 °C to 40 °C |
| Cable | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | Opal UV-stabilised polycarbonate diffuser |



Accessories

| | | | |
|---|--|--|---|
|  <p>Root mount kit A20691</p> |  <p>Circuit breaker box IP44 A21291</p> |  <p>Root mount kit A20491</p> |  <p>6 m - Cylindrical, straight aluminium pole for SYNDY, ANESTI, ARGENTINA APD160127-ASP</p> |
|  <p>5 m - Cylindrical, straight aluminium pole for SYNDY, ANESTI, ARGENTINA APD150127-ASP</p> |  <p>3 m - Cylindrical, straight aluminium pole for ARGENTINA APD130127-ASP</p> |  <p>4 m - Cylindrical, straight aluminium pole for ARGENTINA APD140127-ASP</p> | |