

**BENTON 3 (BE-20001)**



**Product description**

Ø225 mm - Supplied with specific 4.5 m cylindrical, straight aluminium pole: APD125225-BE-20001

**Luminaire Structure**


- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Clear toughened glass
- High-efficiency optical reflector
- Integral control gear

**Optic**




G

**Product colour**

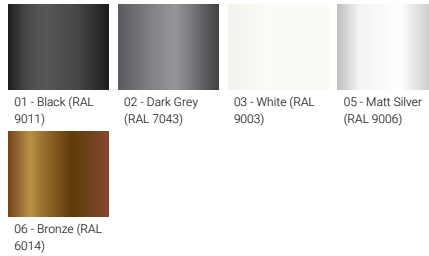

**Special finishes upon request**

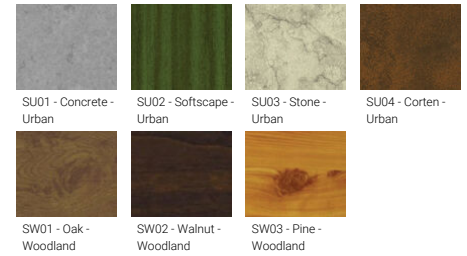

**BENTON 3 (BE-20001)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic value</b>	65°	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	1 COB	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
<b>Power</b>	40 W	<b>Bug</b>	B2-U0-G0	<b>Through wiring</b>	Single cable entry
<b>Lumen</b>	2458 - 2489 lm	<b>ULR</b>	0%	<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency optical reflector
<b>Efficacy</b>	61 - 62 lm/W	<b>ULOR</b>	0%	<b>MacAdam Ellipse</b>	3 SDCM
<b>Driver option</b>	Integral control gear	<b>CIE flux code n°3</b>	99	<b>Lifetime L90B10 (hours)</b>	> 50,700
<b>Driver</b>	Constant current (CC)	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L80B10 (hours)</b>	> 63,500
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B50 (hours)</b>	> 63,500
<b>Optic</b>	G		<b>Weight</b>	33.0 kg	<b>Variants (1-10V, DALI)</b>

**Accessories**



Circuit breaker box IP44  
**A21291**



Root mount kit  
**A20791**



4.5 m - Cylindrical, straight aluminium pole for BENTON  
**APD125225-BE-20001**