

**BENTON 11** (BE-20031-LC)



**Product description**

Ø225 mm - Supplied with specific 4.5 m cylindrical, straight aluminium pole: APD125225-BE-20031 - LIGHTCONNECT™

**Luminaire Structure**


- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear

**Optic**




G

**Product colour**

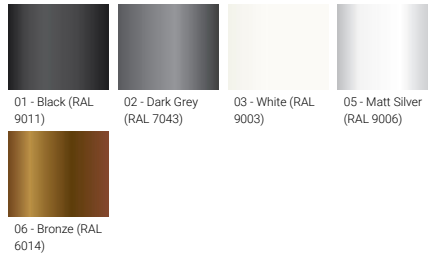

**Special finishes upon request**

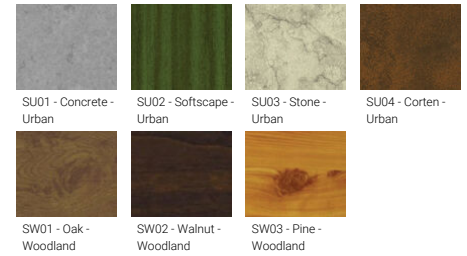

**BENTON 11 (BE-20031-LC)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	G	<b>Through wiring</b>	Single cable entry
<b>Light source</b>	1 COB	<b>Optic value</b>	133°	<b>Lens / Reflector / Optic</b>	Clear toughened glass, High-efficiency polycarbonate lens
<b>Power</b>	40 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>MacAdam Ellipse</b>	3 SDCM
<b>Lumen</b>	2558 - 2751 lm	<b>Dimming type</b>	DALI	<b>Lifetime L90B10 (hours)</b>	> 50,700
<b>Efficacy</b>	64 - 69 lm/W	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B10 (hours)</b>	> 63,500
<b>Driver option</b>	Integral control gear			<b>Lifetime L80B50 (hours)</b>	> 63,500
<b>Driver</b>	Constant current (CC)			<b>Variants (DALI)</b>	
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Weight</b>	33 kg		
		<b>Operating temperature</b>	-20 °C to 40 °C		
		<b>Cable</b>	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable		

**Accessories**



Camera - 180°  
**A91191**



Intercom  
**A91391**



Round power socket  
**A91591**




Speaker 100 W  
**A91291**



WiFi 6 AX Cloud manage AP and Mesh  
**A91091**



Motion sensor - PIR - DALI - Up to 12 m  
**A91691-L7**



EO Hub  
**A91991**



Zhaga Book 18 socket (Down)  
**A90991-D**



Motion sensor - PIR - DALI - Up to 3 m  
**A91691-L2**



NEMA 7 socket  
**A90891**



EV Charger (EO genius)  
**A91491-EOG**