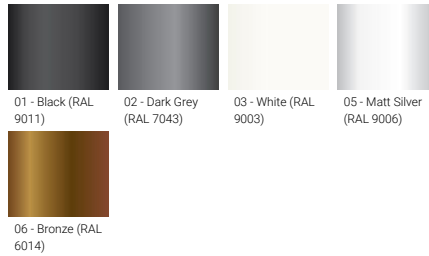
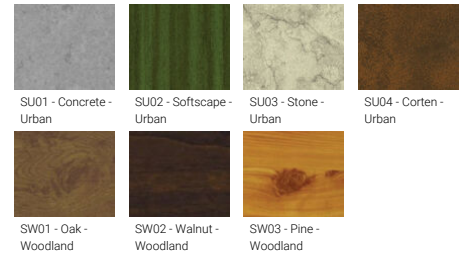


BENTON 11 (BE-20031)**Product description**

Ø225 mm - Supplied with specific 4.5 m cylindrical, straight aluminium pole: APD125225-BE-20031

Luminaire Structure

- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear

Optic**G****Product colour****Special finishes upon request**

BENTON 11 (BE-20031)

Technical information

Material	Aluminium	Optic	G	Through wiring	Single cable entry
Light source	1 COB	Optic value	133°	Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
Power	40 W	CCT / CRI	3000K CRI80, 4000K CRI80	MacAdam Ellipse	3 SDCM
Lumen	2558 - 2751 lm	Dimming type	On/Off, 1-10V, DALI	Lifetime L90B10 (hours)	> 50,700
Efficacy	64 - 69 lm/W	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B10 (hours)	> 63,500
Driver option	Integral control gear			Lifetime L80B50 (hours)	> 63,500
Driver	Constant current (CC)	Weight	33 kg	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Operating temperature	-20 °C to 40 °C		
		Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable		

Accessories



Circuit breaker box IP44
A21291



Root mount kit
A20791