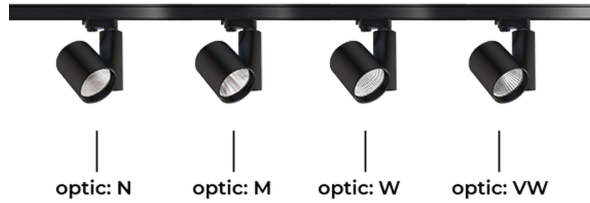




BERLIN 1 (BEB-80021)**Product description**

Medium

**Luminaire Structure**

- Die-cast aluminium housing heat sink
- Adjustable: Tilt 2x90°, Rotation 350°
- With powder coating
- Aluminium reflector
- Integral control gear
- With 3-phase universal adapter


Optic**Product colour**

BERLIN 1 (BEB-80021)


Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI
Light source	1 COB	Optic	N, M, W, VW	Product colours	Black, White
Power	30 W	Optic value	15°, 24°, 30°, 51°	Operating temperature	-20 °C to 40 °C
Lumen	1901 - 2106 lm	CCT / CRI	3000K CRI90, 4000K CRI90	Lens / Reflector / Optic	Aluminium reflector
Efficacy	63 - 70 lm/W	ULR	0%	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Driver option	Integral control gear	ULOR	0%		
Driver	Constant current (CC)	CIE flux code n°3	100		

BEB-80021

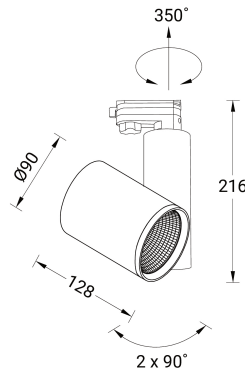

Accessories



Honeycomb louvre
A80111



DALI Control System
Control-DALI