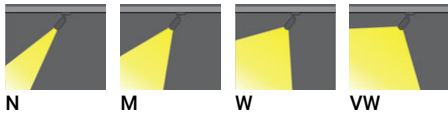



BELIZE 3 (BEZ-80021)**Product description**

Ø90 - 274 mm

**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Adjustable: Tilt 180°, Rotation 360°
- High-efficiency optical reflector or high-efficiency polycarbonate lens
- Integral control gear
- With 3-phase universal adapter

Optic**Product colour**


BELIZE 3 (BEZ-80021)

Technical information


Material	Aluminium
Light source	1 COB
Power	30 W
Lumen	2562 - 2969 lm
Efficacy	85 - 99 lm/W
Driver option	Integral control gear

Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	N, M, W, VW
Optic value	19°, 32°, 50°, 60°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, DALI

Product colours	Black, White
Weight	0.8 kg
Operating temperature	-20 °C to 50 °C
Lens / Reflector / Optic	High-efficiency optical reflector or high-efficiency polycarbonate lens

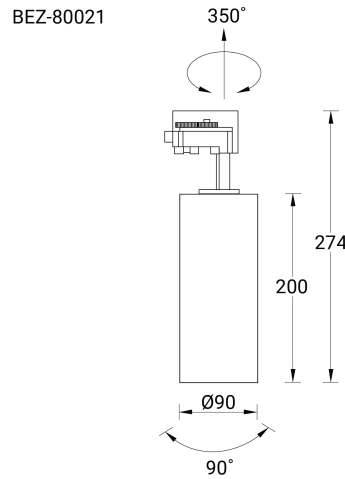

Accessories



Honeycomb louvre
A80117



Surface mounted track adapter -
Black DA
A80119



Surface mounted track adapter -
White DA
A80120



Surface mounted track adapter -
Black ND
A80122



Surface mounted track adapter -
White ND
A80123