

BILLUND 1 (BIU-90003-LC)



Product description

Small - LIGHTCONNECT™




Luminaire Structure

- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable


- Clear toughened glass
- High-efficiency polycarbonate lens

- Integral control gear


Optic

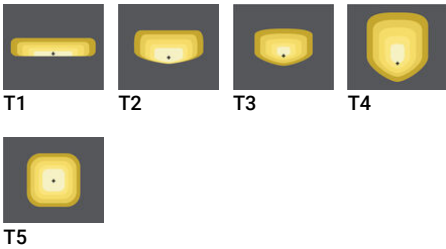

Product colour

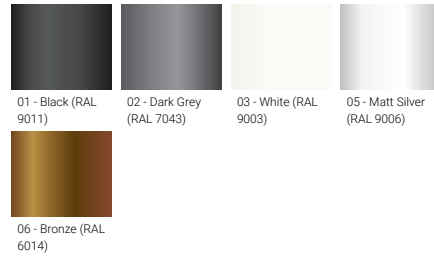

Special finishes upon request

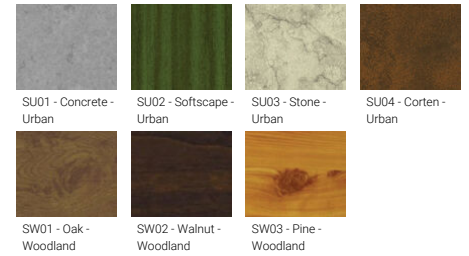

BILLUND 1 (BIU-90003-LC)

Technical information

| | |
|----------------------|-----------------------|
| Material | Aluminium |
| Light source | 36 LED |
| Power | 59 W |
| Lumen | 7007 - 8567 lm |
| Efficacy | 119 - 145 lm/W |
| Driver option | Integral control gear |
| Driver | Constant current (CC) |
| Input voltage | 220-240 V 50/60 Hz |

| | |
|--------------------------|---|
| Optic | T1, T2, T3, T4, T5 |
| Optic value | 135°x70°, 140°x126°, 150°x66°, 149°x100°, 103°x64°, 117°x100° |
| CCT / CRI | 3000K CRI70, 4000K CRI70 |
| Bug | B2-U0-G1, B2-U0-G2, B3-U0-G1, B3-U0-G3 |
| ULR | 0% |
| ULOR | 0% |
| CIE flux code n°3 | 95, 96, 97, 99 |
| Dimming type | DALI |

| | |
|---------------------------------|--|
| Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 4.5 kg |
| Operating temperature | -20 °C to 40 °C |
| Cable | One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable |
| Through wiring | Single cable entry |
| Lens / Reflector / Optic | Clear toughened glass, High-efficiency polycarbonate lens |

Accessories



NEMA 7 socket
A90891



Zhaga Book 18 socket (Up)
A90991-U