

BILLUND 1 (BIU-90004)



Product description


Small




Luminaire Structure

- Single cable entry
- Clear toughened glass
- Integral control gear
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
- High-efficiency polycarbonate lens


Optic

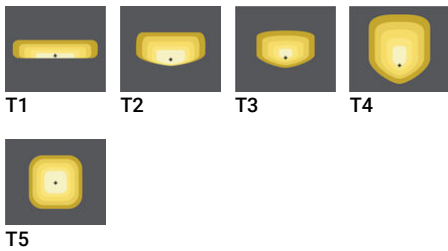

Product colour

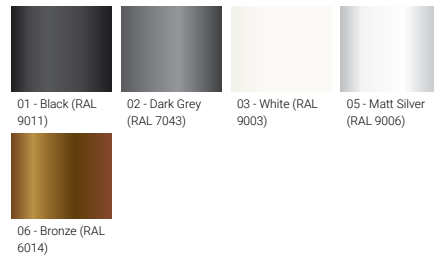

Special finishes upon request

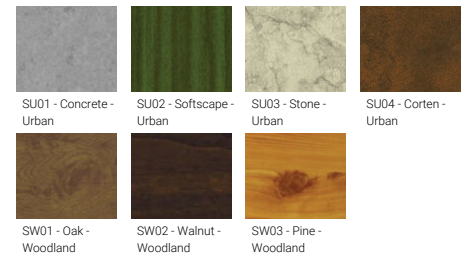

BILLUND 1 (BIU-90004)

Technical information

Material	Aluminium	Optic	T1, T2, T3, T4, T5	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	36 LED	Optic value	150°x104°, 142°x128°, 151°x65°, 135°x61°, 102°x63°, 76°x123°	Weight	4.5 kg
Power	74 W	CCT / CRI	3000K CRI70, 4000K CRI70	Operating temperature	-20 °C to 50 °C
Lumen	8885 - 10863 lm	Bug	B2-U0-G2, B3-U0-G1, B3-U0-G2, B3-U0-G3	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Efficacy	120 - 147 lm/W	ULR	0%	Through wiring	Single cable entry
Driver option	Integral control gear	ULOR	0%	Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
Driver	Constant current (CC)	CIE flux code n°3	95, 96, 97, 99		
Input voltage	220-240 V 50/60 Hz	Dimming type	On/Off, 1-10V, DALI		