

BILLUND 2 (BIU-90011-LC)



Product description

Medium - LIGHTCONNECT™




Luminaire Structure

- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable


- Clear toughened glass
- High-efficiency polycarbonate lens

- Integral control gear


Optic

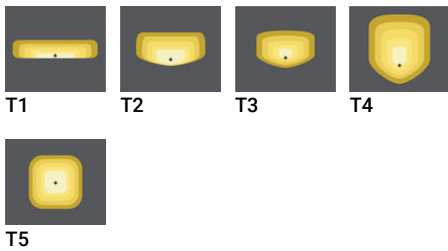

Product colour

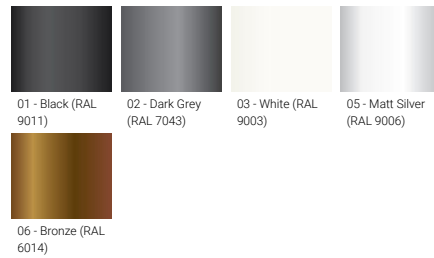

Special finishes upon request

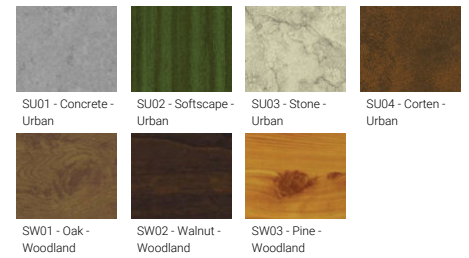

BILLUND 2 (BIU-90011-LC)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|--|---------------------------------|--|
| Material | Aluminium | Optic value | 150°x104°, 142°x128°, 151°x65°, 135°x61°, 102°x63°, 76°x123° | Operating temperature | -20 °C to 40 °C |
| Light source | 96 LED | CCT / CRI | 3000K CRI70, 4000K CRI70 | Cable | One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable |
| Power | 90 W | Bug | B2-U0-G2, B3-U0-G1, B3-U0-G3 | Through wiring | Single cable entry |
| Lumen | 9086 - 11554 lm | ULR | 0% | Lens / Reflector / Optic | Clear toughened glass, High-efficiency polycarbonate lens |
| Efficacy | 101 - 128 lm/W | ULOR | 0% | MacAdam Ellipse | 5 SDCM |
| Driver option | Integral control gear | CIE flux code n°3 | 94, 95, 96, 97, 99 | Lifetime L90B10 (hours) | > 36,000 |
| Driver | Constant current (CC) | Dimming type | DALI | Lifetime L80B10 (hours) | > 74,000 |
| Input voltage | 220-240 V 50/60 Hz | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland | Lifetime L80B50 (hours) | > 81,000 |
| Optic | T1, T2, T3, T4, T5 | Weight | 10.3 kg | | |

Accessories



NEMA 7 socket
A90891



Zhaga Book 18 socket (Up)
A90991-U