

BILLUND 2 (BIU-90012-LC)



Product description

Medium - LIGHTCONNECT™




Luminaire Structure

- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable


- Clear toughened glass
- High-efficiency polycarbonate lens

- Integral control gear


Optic

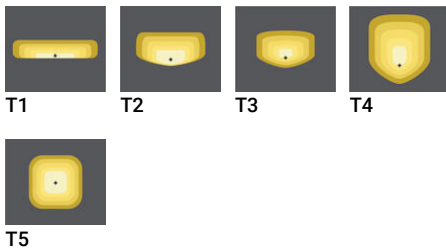

Product colour

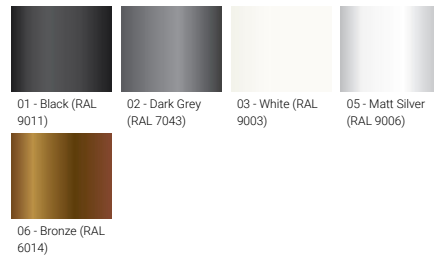

Special finishes upon request

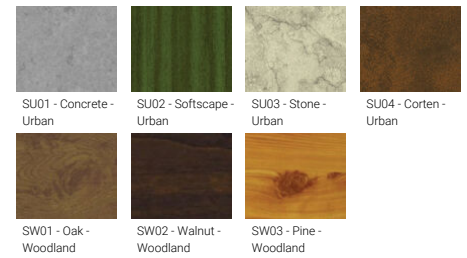

BILLUND 2 (BIU-90012-LC)

Technical information

Material	Aluminium	Optic value	148°x96°, 139°x124°, 150°x73°, 134°x67°, 111°x65°, 116°x99°	Operating temperature	-20 °C to 40 °C
Light source	96 LED	CCT / CRI	3000K CRI70, 4000K CRI70	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Power	115 W	Bug	B2-U0-G2, B3-U0-G2, B3-U0-G3, B4-U0-G1	Through wiring	Single cable entry
Lumen	12045 - 15352 lm	ULR	0%	Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
Efficacy	105 - 133 lm/W	ULOR	0%	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	CIE flux code n°3	95, 96, 97, 99	Lifetime L90B10 (hours)	> 90,000
Driver	Constant current (CC)	Dimming type	DALI	Lifetime L80B10 (hours)	> 90,000
Input voltage	220-240 V 50/60 Hz		Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 90,000
Optic	T1, T2, T3, T4, T5	Product colours			
		Weight	10.3 kg		

Accessories



NEMA 7 socket
A90891



Zhaga Book 18 socket (Up)
A90991-U