

BILLUND 2 (BIU-90013-LC)



Product description

Medium - LIGHTCONNECT™




Luminaire Structure

- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable


- Clear toughened glass
- High-efficiency polycarbonate lens

- Integral control gear


Optic



Product colour

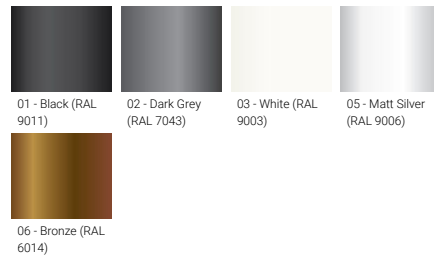

Special finishes upon request

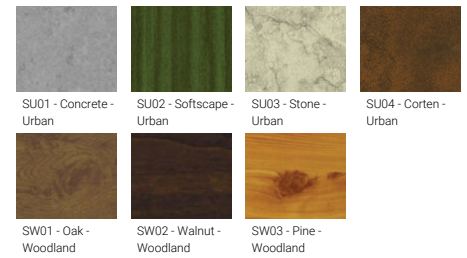

BILLUND 2 (BIU-90013-LC)

Technical information

Material	Aluminium	Optic value	146°x100°, 138°x125°, 153°x97°, 133°x66°, 111°x65°, 92°x121°	Operating temperature	-20 °C to 40 °C
Light source	96 LED	CCT / CRI	3000K CRI70, 4000K CRI70	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Power	120 W	Bug	B3-U0-G2, B3-U0-G3, B4-U0-G1	Through wiring	Single cable entry
Lumen	14742 - 18431 lm	ULR	0%	Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
Efficacy	123 - 154 lm/W	ULOR	0%	MacAdam Ellipse	5 SDCM
Driver option	Integral control gear	CIE flux code n°3	100, 95, 96, 97, 98	Lifetime L90B10 (hours)	> 35,000
Driver	Constant current (CC)	Dimming type	DALI	Lifetime L80B10 (hours)	> 74,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 80,000
Optic	T1, T2, T3, T4, T5	Weight	10.5 kg		

Accessories



NEMA 7 socket
A90891



Zhaga Book 18 socket (Up)
A90991-U