

BILLUND 1 (BIU-90042)



Product description

Small




Luminaire Structure

- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Thermal heat dissipation body
- Single cable entry
- One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable


- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Clear toughened glass
- High-efficiency polycarbonate lens
- Integral control gear

- Surge protection 10kV
- Constant lumen output (CLO) and Night-time dimming options


Optic

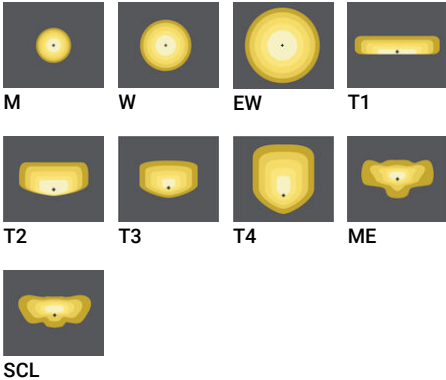

Product colour

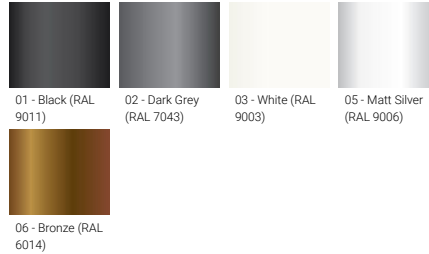

Special finishes upon request

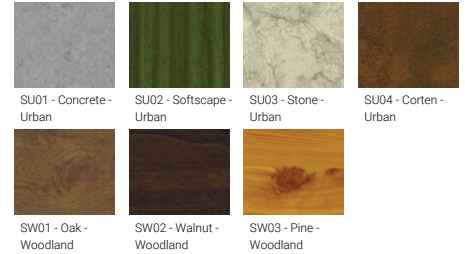


BILLUND 1 (BIU-90042)

Technical information

Material	Aluminium	Optic value	31°, 56°, 106°x113°, 149°x72°, 137°x51°, 126°x89°, 103°x74°, 138°x56°, 151°x65°	Operating temperature	-20 °C to 40 °C
Light source	12 LED	CCT / CRI	3000K CRI70, 3000K CRI80, 4000K CRI70, 4000K CRI80	Cable	One IP68 connector supplied with 0.3 m of 3x1.0 sqmm outdoor cable
Power	42 W	Bug	B1-U0-G1, B2-U0-G0	Through wiring	Single cable entry
Lumen	4139 - 5495 lm	ULR	0%	Lens / Reflector / Optic	Clear toughened glass, High-efficiency polycarbonate lens
Efficacy	99 - 131 lm/W	ULOR	0%	MacAdam Ellipse	5 SDCM
Driver option	Integral control gear	CIE flux code n°3	96, 97, 98, 99	Lifetime L90B10 (hours)	> 35,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 74,000
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 80,000
Optic	M, W, EW, T1, T2, T3, T4, ME, SCL	Weight	6.13 kg	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BIU-90042

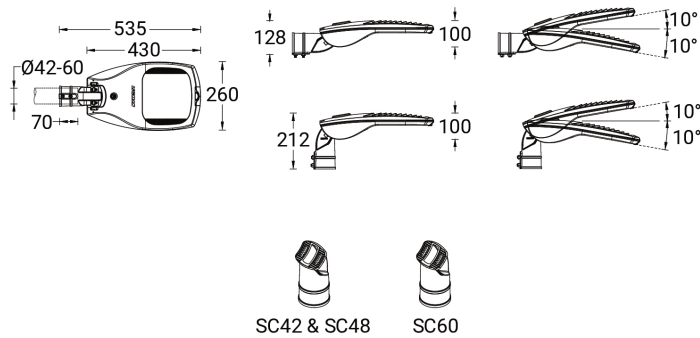

Accessories



DALI Control System
Control-DALI