


**BORNHOLM 4 (BOH-60031) (Version 1)**



**Product description**


Without remote box IP-rated - With remote driver / recessing box - Constant current (CC) 2670 mA

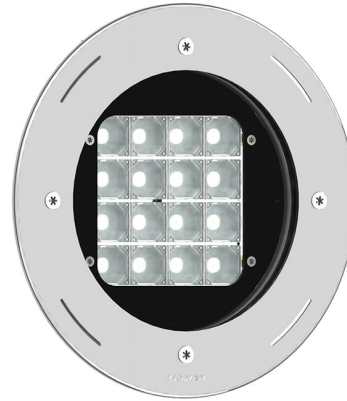

**Luminaire structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in stainless steel 316 grade
- Luminaire must be submerged when operational
- Maximum cable length 2 m
- Outdoor cable needs to be ordered with a specific length
- Maximum distance of the Remote DMX/RDM decoder is 8 m

**Optic**

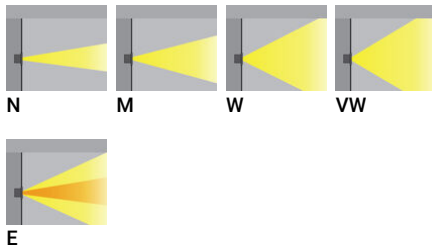

**Product colour**



**BORNHOLM 4** (BOH-60031) (Version 1)


**Technical information**

<b>Material</b>	Stainless Steel
<b>Light source</b>	16 LED
<b>Power</b>	39 W
<b>Lumen</b>	3172 - 4416 lm
<b>Efficacy</b>	81 - 113 lm/W
<b>Driver option</b>	Remote driver (included)
<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	2670 mA, 12 VDC
<b>Optic</b>	N, M, W, VW, E

<b>Optic value</b>	11°, 17°, 32°, 71°x58°, 43°x11°
<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80
<b>Bug</b>	B2-U0-G0, B3-U0-G0
<b>ULR</b>	<1%
<b>ULOR</b>	<1%
<b>CIE flux code n°3</b>	100
<b>Dimming type</b>	On/Off, 1-10V
<b>Product colours</b>	Stainless Steel
<b>Weight</b>	3.6 kg

<b>Operating temperature</b>	-20 °C to 40 °C
<b>Cable</b>	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
<b>Through wiring</b>	Single cable entry
<b>Lens / Reflector / Optic</b>	Clear toughened glass
<b>MacAdam Ellipse</b>	3 SDCM
<b>Lifetime L90B10 (hours)</b>	> 120,000
<b>Lifetime L80B10 (hours)</b>	> 120,000
<b>Lifetime L80B50 (hours)</b>	> 120,000

BOH-60031

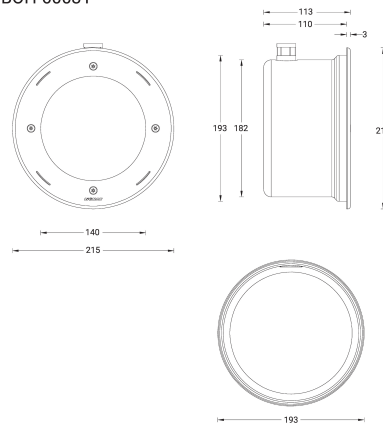

**BORNHOLM 4** (BOH-60031) (Version 1)**Accessory**

---



---

Honeycomb louvre  
**A52521**

---



---

Remote box IP65  
**A61851**

---