


## BORNHOLM 4 (BOH-60031) (Version 1)



### Product description


Without remote box IP-rated - With remote driver /  
recessing box - Constant current (CC) 2670 mA

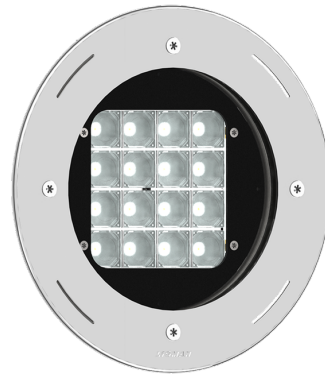


### Luminaire Structure

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Recessing box in stainless steel 316 grade
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length
- Maximum distance of the Remote DMX/RDM decoder is 8 m

### Optic



N




M



W



VW



E

### Product colour



00 - Stainless Steel

# BORNHOLM 4 (BOH-60031) (Version 1)


## Technical information

Material	Stainless Steel
Light source	16 LED
Power	39 W
Lumen	3172 - 4416 lm
Efficacy	81 - 113 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	2670 mA, 12 VDC
Optic	N, M, W, VW, E


Optic value	10°, 16°, 32°, 71°, 11°x43°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B2-U0-G0, B3-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V
Product colours	Stainless Steel
Weight	3.6 kg

Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 120,000
Lifetime L80B10 (hours)	> 120,000
Lifetime L80B50 (hours)	> 120,000

BOH-60031

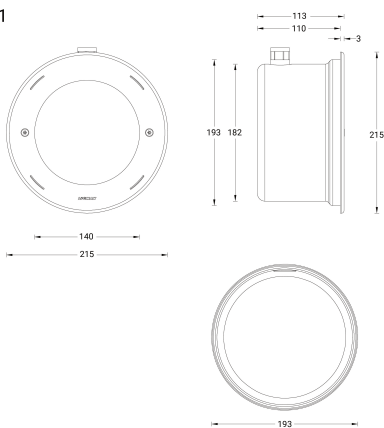

## Accessories



Honeycomb louvre  
A52521



DALI Control System  
Control-DALI



Remote box IP65  
A61851