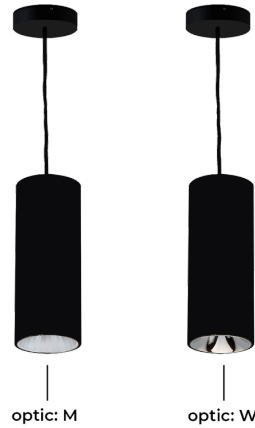


BRISBANE 3 (BRB-95021)**Product description**


Ø100 mm

**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Integral control gear

- CRI 95
- Cloth flex supplied with 1 m as standard

- Reflector finishes options (Satin black, Satin gold, Matt white)
- Accessory: Flush-mounted ceiling rose for BRISBANE 1 and 2

Optic**M****W****Product colour**

01 - Black (RAL 9011)


03 - White (RAL 9003)

BRISBANE 3 (BRB-95021)


Technical information

Material	Aluminium	Input voltage	500 mA, 36 VDC	CIE flux code n°3	100
Light source	1 COB	Optic	M, W	Dimming type	On/Off
Power	19 W	Optic value	31°, 60°	Product colours	Black, White
Lumen	1772 - 1807 lm	CCT / CRI	3000K CRI95, 4000K CRI95	Weight	2 kg
Efficacy	93 - 95 lm/W	Bug	B2-U0-G0	Operating temperature	-20 °C to 40 °C
Driver option	Remote driver (included)	ULR	0%	Reflector finishes options	
Driver	Constant current (CC)	ULOR	0%	(Satin black, Satin gold, Matt white)	

BRB-95021

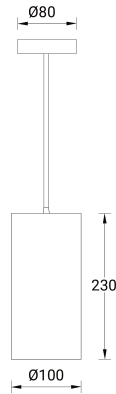


Accessories



Reflector finish (Matt white)
A80024-MW



Reflector finish (Satin black)
A80024-SB



Reflector finish (Satin gold)
A80024-SG