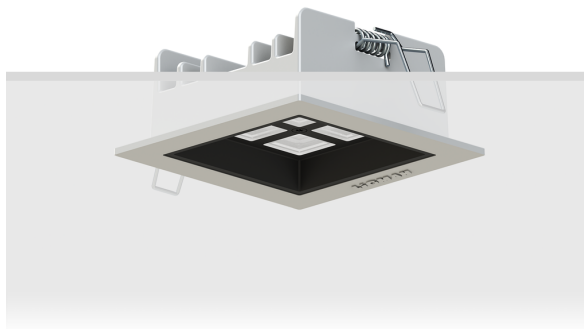



BRIGHTON 3 (BRI-80001)**Luminaire Structure**

- Extruded aluminium housing with powder coating
- Stainless steel fasteners in grade 316
- Toolless flush-mount installation for 1-25 mm false ceilings
- Remote driver
- Modular design for easy maintenance

Optic**M****W****EW****Product colour**08 - Glossy White
(RAL 9010)09 - Glossy Black
(HB451022M)

BRIGHTON 3 (BRI-80001)


Technical information

Material	Aluminium
Light source	4 LED
Power	11 W
Lumen	954 - 1086 lm
Efficacy	87 - 99 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	700 mA, 12 VDC
Optic	M, W, EW

Optic value	26°, 52°, 69°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V, DALI
Product colours	Glossy White, Glossy Black
Weight	0.57 kg

Operating temperature	-20 °C to 40 °C
Lens / Reflector / Optic	High-efficiency PMMA lens
MacAdam Ellipse	3 SDCM
Lifetime L90B10 (hours)	> 90,000
Lifetime L80B10 (hours)	> 90,000
Lifetime L80B50 (hours)	> 90,000
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

BRI-80001



Accessories



DALI Control System
Control-DALI