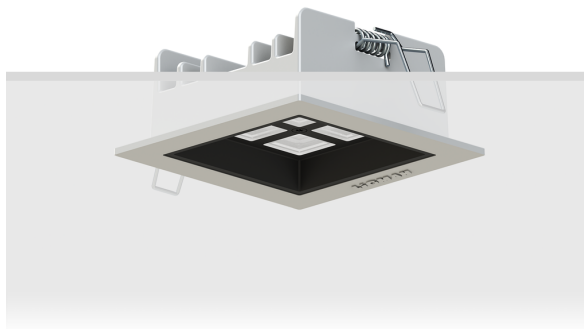



**BRIGHTON 4 (BRI-80002)****Luminaire Structure**

- Extruded aluminium housing with powder coating
- Stainless steel fasteners in grade 316
- Toolless flush-mount installation for 1-25 mm false ceilings
- Remote driver
- Modular design for easy maintenance


**Optic****M****W****EW****Product colour**08 - Glossy White  
(RAL 9010)09 - Glossy Black  
(HB451022M)

**BRIGHTON 4 (BRI-80002)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic value</b>	26°, 52°, 69°	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Light source</b>	4 LED	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Lens / Reflector / Optic</b>	High-efficiency PMMA lens
<b>Power</b>	14 W	<b>Bug</b>	B1-U0-G0	<b>MacAdam Ellipse</b>	3 SDCM
<b>Lumen</b>	1192 - 1358 lm	<b>ULR</b>	0%	<b>Lifetime L90B10 (hours)</b>	> 90,000
<b>Efficacy</b>	85 - 97 lm/W	<b>ULOR</b>	0%	<b>Lifetime L80B10 (hours)</b>	> 90,000
<b>Driver option</b>	Remote driver (included)	<b>CIE flux code n°3</b>	100	<b>Lifetime L80B50 (hours)</b>	> 90,000
<b>Driver</b>	Constant current (CC)	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Variants (On/Off, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Input voltage</b>	900 mA, 12 VDC	<b>Product colours</b>	Glossy White, Glossy Black		
<b>Optic</b>	M, W, EW	<b>Weight</b>	0.57 kg		

**BRI-80002**

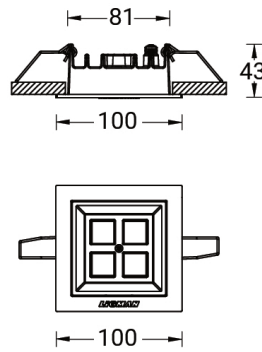

**Accessories**



DALI Control System  
Control-DALI