

**CAPSULE 5 (CA-30607)**



**Product description**

TW



**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear

**Optic**



G

**Product colour**




01 - Black (RAL 9011)    02 - Dark Grey (RAL 7043)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

**Special finishes upon request**

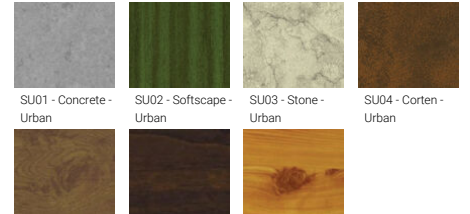

SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban  
 SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**CAPSULE 5 (CA-30607)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic value</b>	102°x109°	<b>Operating temperature</b>	-20 °C to 50 °C
<b>Light source</b>	192 LED	<b>CCT / CRI</b>	TW (2700K - 6500K)	<b>Through wiring</b>	Two cable entries for through wiring
<b>Power</b>	16 W	<b>Bug</b>	B0-U3-G1	<b>Lens / Reflector / Optic</b>	Opal UV-stabilised polycarbonate diffuser
<b>Lumen</b>	631 lm	<b>ULR</b>	15.67%	<b>MacAdam Ellipse</b>	3 SDCM
<b>Efficacy</b>	39 lm/W	<b>ULOR</b>	15.67%	<b>Lifetime L90B10 (hours)</b>	> 37,000
<b>Driver option</b>	Integral control gear	<b>CIE flux code n°3</b>	84	<b>Lifetime L80B10 (hours)</b>	> 78,000
<b>Driver</b>	Constant current (CC)	<b>Dimming type</b>	DALI	<b>Lifetime L80B50 (hours)</b>	> 86,000
<b>Input voltage</b>	220-240 V 50/60 Hz	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Variants (DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Optic</b>	G		<b>Weight</b>	2.2 kg	

**CA-30607**

