

DUOMO 2 (DU-10206-1-SB)**IP65****IK08****Product description**

Ø186 - 1097 mm - Dome top - With integrated security core (Anti-traffic)

**Luminaire Structure**

- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear

Optic


**G**

DUOMO 2 (DU-10206-1-SB)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|--------------------------|---------------------------------|---|
| Light source | 1 COB | Optic value | 360° | Operating temperature | -20 °C to 40 °C |
| Power | 41 W | CCT / CRI | 3000K CRI80, 4000K CRI80 | Cable | One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable |
| Lumen | 664 - 673 lm | Bug | B0-U3-G1 | Through wiring | Single cable entry |
| Efficacy | 16 lm/W | ULR | 46% | Lens / Reflector / Optic | Opal toughened glass diffuser |
| Driver option | Integral control gear | ULOR | 46% | MacAdam Ellipse | 3 SDCM |
| Driver | Constant current (CC) | CIE flux code n°3 | 45 | Lifetime L90B10 (hours) | > 55,000 |
| Input voltage | 220-240 V 50/60 Hz | Dimming type | On/Off, 1-10V, DALI | Variants (1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |
| Optic | G | Weight | 10.3 kg | | |

DU-10206-1-SB

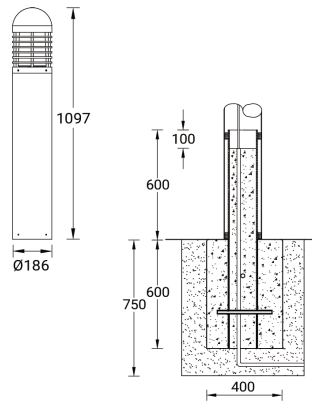

Accessories



Power connection box (IP65)
modification upon request
POWER-BOX-IP65



DALI Control System
Control-DALI