

DUOMO 2 (DU-10206-1)



Product description

Ø186 - 1097 mm - Dome top



Luminaire Structure


- Die-cast aluminium housing
- Extruded aluminium column
- Pre-treated before powder coating ensuring high corrosion resistance
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear

Optic




G

Product colour

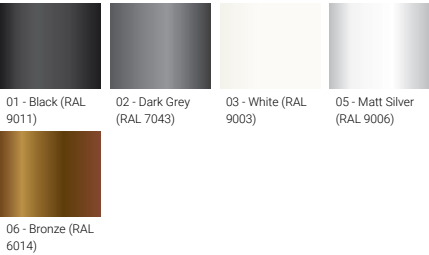

Special finishes upon request

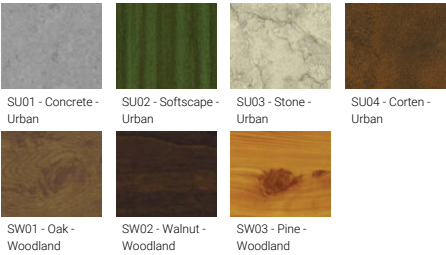


DUOMO 2 (DU-10206-1)


Technical information

Material	Aluminium	Optic value	360°	Operating temperature	-20 °C to 40 °C
Light source	1 COB	CCT / CRI	3000K CRI80, 4000K CRI80	Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Power	41 W	Bug	B0-U3-G1	Through wiring	Single cable entry
Lumen	664 - 673 lm	ULR	46%	Lens / Reflector / Optic	Opal toughened glass diffuser
Efficacy	16 lm/W	ULOR	46%	MacAdam Ellipse	3 SDCM
Driver option	Integral control gear	CIE flux code n°3	45	Lifetime L90B10 (hours)	> 55,000
Driver	Constant current (CC)	Dimming type	On/Off, 1-10V, DALI	Variants (1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Input voltage	220-240 V 50/60 Hz	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland		
Optic	G	Weight	10.3 kg		

DU-10206-1

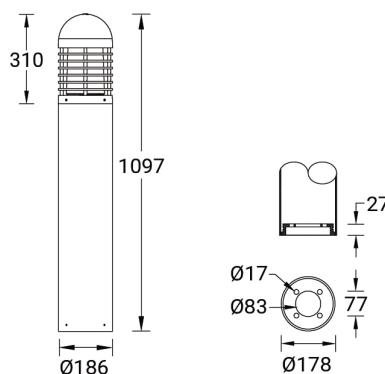

Accessories



Anchor bolt
A10391



Power connection box (IP65)
modification upon request
POWER-BOX-IP65



DALI Control System
Control-DALI