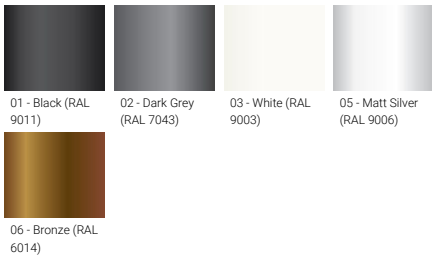
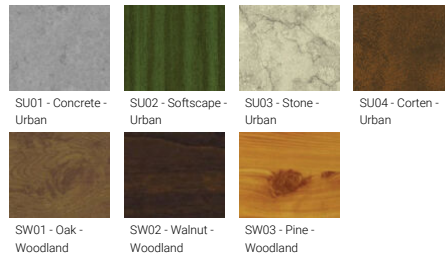


DUOMO 12 (DU-95036-2-1)**Product description**

Medium - Straight shade - Dome top

**Luminaire Structure**

- Painted galvanised steel pendant rod
- Die-cast aluminium housing
- Pre-treated before powder coating ensuring high corrosion resistance
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass diffuser
- Integral control gear
- Optional surface mounting box for easy wiring or conduit connection when wiring from behind is not possible

Product colour**Special finishes upon request**

DUOMO 12 (DU-95036-2-1)

Technical information

| | | | | | |
|----------------------|-----------------------|--------------------------|--------------------------|---------------------------------|--|
| Material | Aluminium | Optic | G | Product colours | Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Light source | 1 COB | Optic value | 129° | Weight | 10.0 kg |
| Power | 41 W | CCT / CRI | 3000K CRI80, 4000K CRI80 | Operating temperature | -20 °C to 40 °C |
| Lumen | 1763 - 1785 lm | Bug | B1-U3-G1 | Through wiring | Two cable entries for through wiring |
| Efficacy | 43 - 44 lm/W | ULR | 15% | Lens / Reflector / Optic | Opal toughened glass diffuser |
| Driver option | Integral control gear | ULOR | 15% | MacAdam Ellipse | 3 SDCM |
| Driver | Constant current (CC) | CIE flux code n°3 | 87 | Lifetime L90B10 (hours) | > 55,000 |
| Input voltage | 220-240 V 50/60 Hz | Dimming type | On/Off, 1-10V, DALI | Variants (1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

DU-95036-2-1

