

**FORREY 20** (FOR-30052)



**Product description**

Ø880 - 933 mm - With shade & louver & opal diffuser



microPrim™

**Luminaire Structure**

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Models with shade will have colour white coating at inside of shade luminaire and outside surface coating according to colour of luminaire
- Two cable entries for through wiring
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- White coated aluminium reflector on the top of luminaire
- Opal UV-stabilised polycarbonate diffuser
- Integral control gear
- FORREY luminaires with opal lens and colder than 3000K CCT do not meet the IDA certification requirements

**Optic**




G

**Product colour**



**Special finishes upon request**

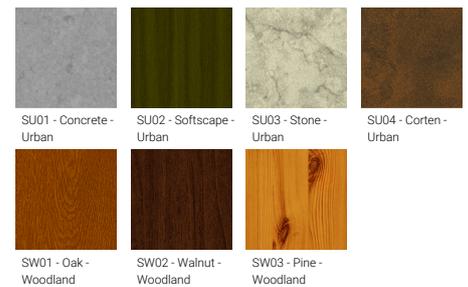


**FORREY 20 (FOR-30052)**

**Technical information**

<b>Material</b>	Aluminium	<b>Optic</b>	G	<b>Lens / Reflector / Optic</b>	White coated aluminium reflector on the top of luminaire, Opal UV-stabilised polycarbonate diffuser	
<b>Light source</b>	180 LED	<b>Optic value</b>	360°	<b>MacAdam Ellipse</b>	3 SDCM	
<b>Power</b>	60 W	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80	<b>Lifetime L90B10 (hours)</b>	> 23,000	
<b>Lumen</b>	3469 - 4053 lm	<b>Dimming type</b>	On/Off, 1-10V, DALI	<b>Lifetime L80B10 (hours)</b>	> 45,000	
<b>Efficacy</b>	58 - 68 lm/W	<b>Product colours</b>	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	<b>Lifetime L80B50 (hours)</b>	> 49,000	
<b>Driver option</b>	Integral control gear			<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
<b>Driver</b>	Constant current (CC)					
<b>Input voltage</b>	220-240 V 50/60 Hz					
		<b>Weight</b>	17.6 kg			
		<b>Operating temperature</b>	-20 °C to 50 °C			
		<b>Through wiring</b>	Two cable entries for through wiring			

FOR-30052

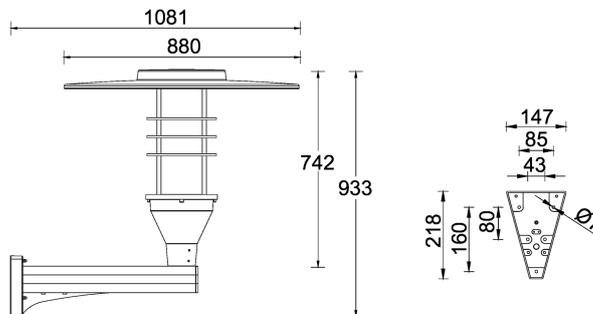

**FORREY 20** (FOR-30052)

**Accessory**

---



DALI Control System  
**Control-DALI**

---