

FORREY 33 (FOR-30081)



Product description

Ø508 - 707 mm - With shade




Luminaire Structure

- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- Models with shade will have colour white coating at inside of shade luminaire and outside surface coating according to colour of luminaire
- Two cable entries for through wiring

- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- White coated aluminium reflector on the top of luminaire
- High-efficiency PMMA lens

- Integral control gear
- FORREY luminaires with opal lens and colder than 3000K CCT do not meet the IDA certification requirements

Optic



T2

T3

T4

T5

Product colour



01 - Black (RAL 9011)

02 - Dark Grey (RAL 7043)


03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)



06 - Bronze (RAL 6014)

Special finishes upon request



SU01 - Concrete - Urban


SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland




SW03 - Pine - Woodland

FORREY 33 (FOR-30081)

Technical information

Material	Aluminium	Input voltage	220-240 V 50/60 Hz	Through wiring	Two cable entries for through wiring
Light source	1 COB	Optic	T2, T3, T4, T5	Lens / Reflector / Optic	White coated aluminium reflector on the top of luminaire, High-efficiency PMMA lens
Power	48 W	Optic value	143°x86°, 132°x99°, 131°x117°, 119°x134°	MacAdam Ellipse	3 SDCM
Lumen	4247 - 4813 lm	CCT / CRI	3000K CRI80, 4000K CRI80	Lifetime L90B10 (hours)	> 50,700
Efficacy	89 - 101 lm/W	Dimming type	On/Off, 1-10V, DALI	Lifetime L80B10 (hours)	> 63,500
Driver option	Integral control gear	Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	Lifetime L80B50 (hours)	> 63,500
Driver	Constant current (CC)	Operating temperature	-20 °C to 40 °C	Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

FOR-30081

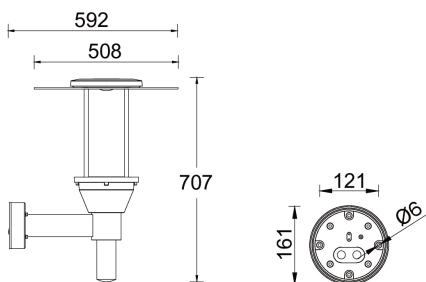

Accessories

