

FRAME 1 (FRA-10001)**Product description**

Down (Optic) & Up (Optic 2nd)

**Luminaire Structure**


- Die-cast aluminium housing and frame
- Pre-treated before powder coating ensuring high corrosion resistance
- IK08 for the concealed downlight lens and IK10 for the whole body and top casting
- Single cable entry
- One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 304 with zinc flake coating (ZFC)
- Durable silicone rubber gasket
- Opal toughened glass
- Integral control gear
- Surge protection 10kV
- Universal power socket & USB (IP66, IK06) is available as an accessory

Optic**G / G****Product colour**

01 - Black (RAL 9011) 02 - Dark Grey (RAL 7043) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)




06 - Bronze (RAL 6014)

Special finishes upon request


SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland

FRAME 1 (FRA-10001)


Technical information

Material	Aluminium
Light source	4 x 36 & 2 x 36 LED
Power	36 W
Lumen	461 - 479 lm
Efficacy	13 lm/W
Driver option	Integral control gear
Driver	Constant current (CC)


Input voltage	220-240 V 50/60 Hz
Optic	G
Optic value	360°
Optic (2nd)	G
Optic (2nd) value	72°
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, Dark Grey, White, Matt Silver, Bronze, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	27 kg
Operating temperature	-20 °C to 40 °C
Cable	One IP68 connector supplied with 0.2 m of 3x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Opal toughened glass
Variants (On/Off)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

FRA-10001

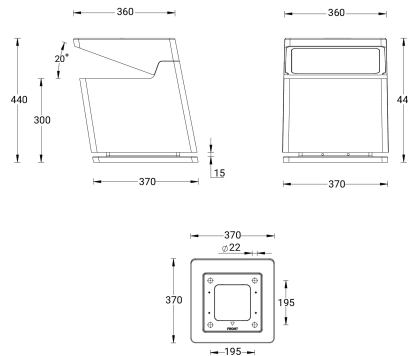

Accessories



Anchor bolt
A12591



Universal power plug & USB
A92391



North America power plug & USB Type C
A92391-US



DALI Control System
Control-DALI