

FUNEN 1 (FUN-50002) (Version 1)



Product description

Without remote driver - With remote DMX/RDM decoder - Constant voltage (CV) 24 V - RGBW



Luminaire Structure

- | | | |
|---|--|---|
| <ul style="list-style-type: none"> - Stainless steel body in grade 316 - Single cable entry - One cable gland supplied with 2 m of 5x0.75 sqmm outdoor cable - Stainless steel fasteners in grade 316 - Durable silicone rubber gasket | <ul style="list-style-type: none"> - Clear toughened glass - Remote driver (not included) - Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products - Luminaire must be submerged when operational - Maximum depth 2 m | <ul style="list-style-type: none"> - Outdoor cable needs to be ordered with a specific length - Maximum distance of the Remote DMX/RDM decoder is 8 m |
|---|--|---|

Optic



M

Product colour




00 - Stainless Steel

FUNEN 1 (FUN-50002) (Version 1)


Technical information

Material	Stainless Steel	Optic	M	Through wiring	Single cable entry
Light source	1 LED	Optic value	34°	Lens / Reflector / Optic	Clear toughened glass
Power	4 W	CCT / CRI	RGBW30, RGBW40	MacAdam Ellipse	7 SDCM
Lumen	170 lm	Dimming type	DMX, DMX/RDM	Lifetime L90B10 (hours)	> 15,000
Efficacy	43 lm/W	Product colours	Stainless Steel	Lifetime L80B10 (hours)	> 31,000
Driver option	Remote driver (not included)	Weight	0.4 kg	Lifetime L80B50 (hours)	> 34,000
Driver	Constant voltage (CV)	Operating temperature	-20 °C to 40 °C		
Input voltage	24 VDC	Cable	One cable gland supplied with 2 m of 5x0.75 sqmm outdoor cable		

FUN-50002

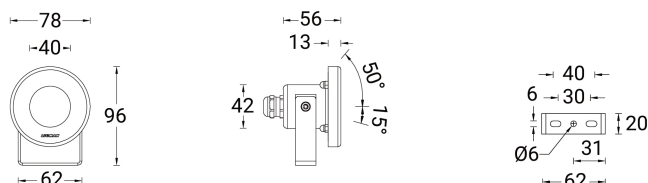

Accessories



Honeycomb louvre
A52221



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM



Driver (CV) - On/Off - 36 W - IP67
- 24 V
A34491-ND



Driver (CV) - On/Off - 60 W - IP67
- 24 V
A34591-ND



Driver (CV) - On/Off - 100 W -
IP67 - 24 V
A34791-ND



Driver (CV) - On/Off - 150 W -
IP67 - 24 V
A34891-ND



Driver (CV) - On/Off - 200 W -
IP67 - 24 V
A34991-ND

FUNEN 1 (FUN-50002) (Version 1)



Driver (CV) - On/Off - 350 W -
IP67 - 24 V
A35091-ND
