
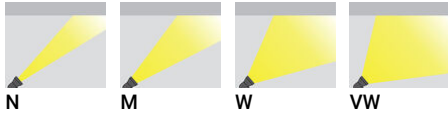


FUNEN 2 (FUN-50011) (Version 2)**Product description**

Without remote box IP-rated - With remote driver -
Constant current (CC) 800 mA

**Luminaire Structure**

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length
- Maximum distance of the Remote DMX/RDM decoder is 8 m

Optic**Product colour**

00 - Stainless Steel

FUNEN 2 (FUN-50011) (Version 2)


Technical information

Material	Stainless Steel
Light source	4 LED
Power	11 W
Lumen	798 - 1068 lm
Efficacy	73 - 97 lm/W
Driver option	Remote driver (included)
Driver	Constant current (CC)
Input voltage	700 mA, 12 VDC


Optic	N, M, W, VW, E
Optic value	11°, 17°, 33°, 71°, 11°x41°
CCT / CRI	3000K CRI80, 4000K CRI80
Bug	B1-U0-G0, B2-U0-G0
ULR	0%
ULOR	0%
CIE flux code n°3	100
Dimming type	On/Off, 1-10V

Product colours	Stainless Steel
Weight	0.9 kg
Operating temperature	-20 °C to 40 °C
Cable	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
Through wiring	Single cable entry
Lens / Reflector / Optic	Clear toughened glass
Variants (1-10V)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

FUN-50011

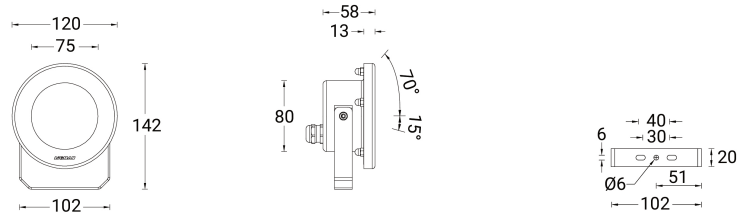

Accessories



Honeycomb louvre
A52321



Remote box IP65
A80191