

FUNEN 3 (FUN-50021) (Version 1)



Product description

Without remote box IP-rated - With remote driver -
Constant current (CC) 2100 mA



Luminaire Structure

- Stainless steel body in grade 316
- Single cable entry
- One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
- Stainless steel fasteners in grade 316
- Durable silicone rubber gasket
- Clear toughened glass
- Remote driver (included)
- Remote box IP-rated is not included and is to be ordered separately for constant current (CC) products
- Luminaire must be submerged when operational
- Maximum depth 2 m
- Outdoor cable needs to be ordered with a specific length
- Maximum distance of the Remote DMX/RDM decoder is 8 m

Optic



N



M



W



VW



E

Product colour




00 - Stainless
Steel

FUNEN 3 (FUN-50021) (Version 1)


Technical information

Material	Stainless Steel	Optic	N, M, W, VW, E	Product colours	Stainless Steel
Light source	9 LED	Optic value	11°, 17°, 32°, 71°, 14°x43°	Weight	1.4 kg
Power	23 W	CCT / CRI	3000K CRI80, 4000K CRI80	Operating temperature	-20 °C to 40 °C
Lumen	1923 - 2437 lm	Bug	B2-U0-G0, B3-U0-G0	Cable	One cable gland supplied with 2 m of 2x1.0 sqmm outdoor cable
Efficacy	84 - 106 lm/W	ULR	0%	Through wiring	Single cable entry
Driver option	Remote driver (included)	ULOR	0%	Lens / Reflector / Optic	Clear toughened glass
Driver	Constant current (CC)	CIE flux code n°3	100		
Input voltage	2100 mA, 9 VDC	Dimming type	On/Off, 1-10V		

FUN-50021

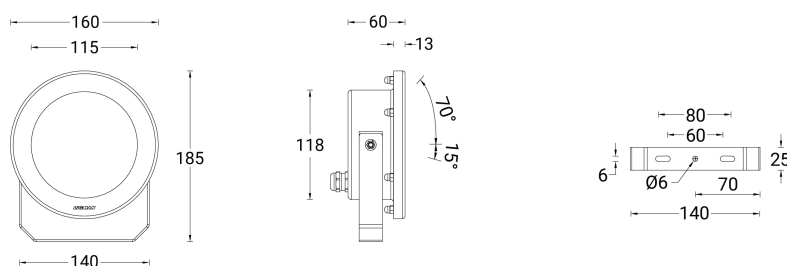

Accessories



Honeycomb louvre
A52421



DALI Control System
Control-DALI



Remote box IP65
A80291