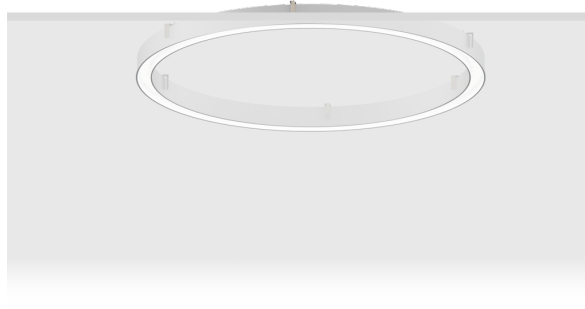



**GAVLE 1** (GAV-80001)**Product description**

Down - 70x90 mm - 500 mm

**Luminaire Structure**

- Integral control gear for On/Off (-ND), DALI (-DA).  
Remote driver is included for 1-10V (-DI)

**Optic**


0

**Product colour**

01 - Black (RAL 9011)

03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)


**Special finishes upon request**

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban



SW01 - Oak - Woodland



SW02 - Walnut - Woodland



SW03 - Pine - Woodland

**GAVLE 1 (GAV-80001)**


**Technical information**

<b>Material</b>	Aluminium	<b>Input voltage</b>	220-240 V 50/60 Hz	<b>CIE flux code n°3</b>	96	
<b>Light source</b>	192 LED	<b>Optic</b>	0	<b>Dimming type</b>	On/Off, 1-10V, DALI	
<b>Power</b>	26 W	<b>Optic value</b>	102°	<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland	
<b>Lumen</b>	2352 - 2455 lm	<b>CCT / CRI</b>	3000K CRI80, 4000K CRI80		<b>Weight</b>	3.7 kg
<b>Efficacy</b>	90 - 94 lm/W	<b>Bug</b>	B1-U1-G1		<b>Operating temperature</b>	-20 °C to 40 °C
<b>Driver option</b>	Integral control gear for On/Off (-ND), DALI (-DA). Remote driver is included for 1-10V (-DI)	<b>ULR</b>	0%	<b>Variants (On/Off, 1-10V, DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)	
<b>Driver</b>	Constant current (CC)	<b>ULOR</b>	0%			

**Accessories**



Xpress wireless switch  
**A90591**



Wireless bluetooth converter  
**A90291**



DALI Control System  
**Control-DALI**