

GAVLE 3 (GAV-80131)



Product description

Down - 60x90 mm - 2000 mm



Luminaire Structure

- Extruded aluminium bended ring profile with powder coating
- Stainless steel fasteners in grade 316
- Steel brackets for ceiling down mounting option

- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management

- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI) for GAV-80101, GAV-80111, GAV-80121, GAV-80131, GAV-80141, GAV-80151, GAV-80161, GAV-80171, GAV-80201, GAV-80211, GAV-80221, GAV-80231, GAV-80241, GAV-80251, GAV-80261, GAV-80271
- Wireless control available through Bluetooth connection

Optic




0

Product colour



01 - Black (RAL 9011) 03 - White (RAL 9003) 05 - Matt Silver (RAL 9006)

Special finishes upon request

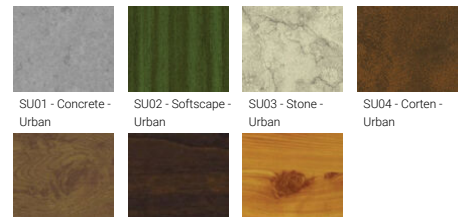

SU01 - Concrete - Urban SU02 - Softscape - Urban SU03 - Stone - Urban SU04 - Corten - Urban
SW01 - Oak - Woodland SW02 - Walnut - Woodland SW03 - Pine - Woodland

GAVLE 3 (GAV-80131)


Technical information

| | |
|----------------------|---|
| Material | Aluminium |
| Light source | 768 LED |
| Power | 98 W |
| Lumen | 9597 - 10018 lm |
| Efficacy | 98 - 102 lm/W |
| Driver option | Integral control gear for On/Off (-ND), DALI (-DA). Remote driver is included for 1-10V (-DI) |
| Driver | Constant current (CC) |


| | |
|----------------------|--------------------------|
| Input voltage | 220-240 V 50/60 Hz |
| Optic | 0 |
| Optic value | 102° |
| CCT / CRI | 3000K CRI80, 4000K CRI80 |
| Bug | B3-U1-G1 |
| ULR | 0% |
| ULOR | 0% |

| | |
|---------------------------------------|---|
| CIE flux code n°3 | 96 |
| Dimming type | On/Off, 1-10V, DALI |
| Product colours | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| Weight | 15.8 kg |
| Operating temperature | -20 °C to 40 °C |
| Variants (On/Off, 1-10V, DALI) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |


GAV-80131

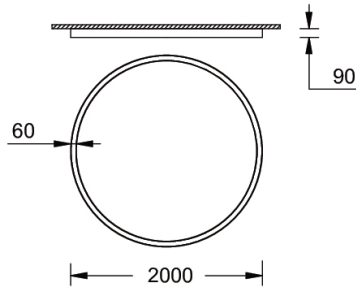

Accessories



Ceiling-mounting bracket (40 mm profile)
A81381



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI