

**GAVLE 3** (GAV-80271)



**Product description**

Down (Optic) & Up (Optic 2nd) - 60x100mm - 5000 mm



**Luminaire Structure**

- Extruded aluminium bended ring profile with powder coating
- Stainless steel fasteners in grade 316
- Steel brackets for ceiling down mounting option

- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management

- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI) for GAV-80101, GAV-80111, GAV-80121, GAV-80131, GAV-80141, GAV-80151, GAV-80161, GAV-80171, GAV-80201, GAV-80211, GAV-80221, GAV-80231, GAV-80241, GAV-80251, GAV-80261, GAV-80271
- Wireless control available through Bluetooth connection

**Optic**




0

**Product colour**



01 - Black (RAL 9011)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)

**Special finishes upon request**



SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**GAVLE 3** (GAV-80271)


**Technical information**

|                      |                                                                                               |
|----------------------|-----------------------------------------------------------------------------------------------|
| <b>Material</b>      | Aluminium                                                                                     |
| <b>Light source</b>  | 1920 & 1920 LED                                                                               |
| <b>Power</b>         | 499 W                                                                                         |
| <b>Lumen</b>         | 50359 - 52567 lm                                                                              |
| <b>Efficacy</b>      | 101 - 105 lm/W                                                                                |
| <b>Driver option</b> | Integral control gear for On/Off (-ND), DALI (-DA). Remote driver is included for 1-10V (-DI) |


|                      |                          |
|----------------------|--------------------------|
| <b>Driver</b>        | Constant current (CC)    |
| <b>Input voltage</b> | 220-240 V 50/60 Hz       |
| <b>Optic</b>         | 0                        |
| <b>Optic value</b>   | Opal                     |
| <b>CCT / CRI</b>     | 3000K CRI80, 4000K CRI80 |
| <b>Dimming type</b>  | On/Off, 1-10V, DALI      |

|                               |                                                                                                                                                   |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product colours</b>        | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| <b>Weight</b>                 | 48.8 kg                                                                                                                                           |
| <b>Operating temperature</b>  | -20 °C to 40 °C                                                                                                                                   |
| <b>Variants (1-10V, DALI)</b> | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)                                   |

GAV-80271

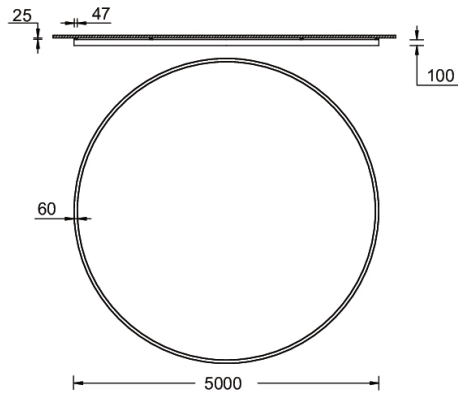

**Accessories**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**