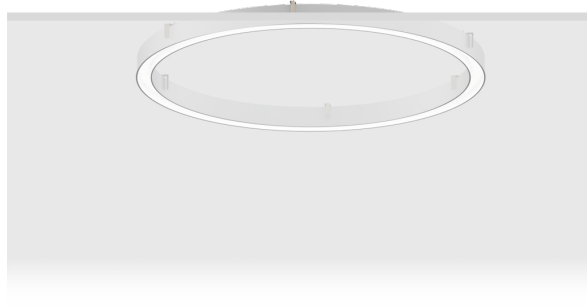



GAVLE 2 (GAV-80302)**Product description**


Down - 110x90 mm - 500 mm - TW

**Luminaire Structure**

- Remote driver (included)

Optic

0


Product colour01 - Black (RAL
9011)03 - White (RAL
9003)05 - Matt Silver
(RAL 9006)**Special finishes upon request**SU01 - Concrete -
UrbanSU02 - Softscape -
UrbanSU03 - Stone -
UrbanSU04 - Corten -
UrbanSW01 - Oak -
WoodlandSW02 - Walnut -
WoodlandSW03 - Pine -
Woodland

GAVLE 2 (GAV-80302)


Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	576 LED	Input voltage	500 mA,	Weight	3.9 kg
Power	37 W	Optic	0	Operating temperature	-20 °C to 40 °C
Lumen	4125 lm	Optic value	102°	Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Efficacy	111 lm/W	CCT / CRI	TW (2700K - 6500K)		
Driver option	Remote driver (included)	Dimming type	DALI		

Gavle 500

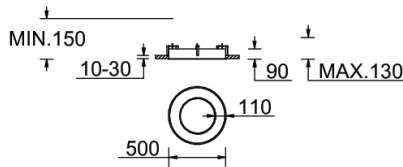

Accessories



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI