

**GAVLE 4** (GAV-80463)



**Product description**


Down - 100x90 mm - 4000 mm - RGBW



**Luminaire Structure**

- Extruded aluminium bended ring profile with powder coating
- Stainless steel fasteners in grade 316
- Steel brackets for ceiling down mounting option
- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI) for GAV-80101, GAV-80111, GAV-80121, GAV-80131, GAV-80141, GAV-80151, GAV-80161, GAV-80171, GAV-80201, GAV-80211, GAV-80221, GAV-80231, GAV-80241, GAV-80251, GAV-80261, GAV-80271
- Wireless control available through Bluetooth connection

**Optic**




0

**Product colour**



01 - Black (RAL 9011)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)

**Special finishes upon request**

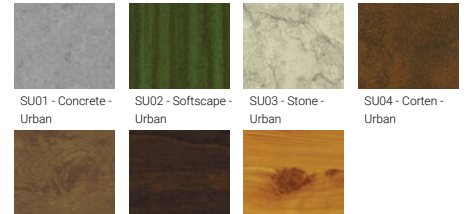


SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban  
 SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**GAVLE 4 (GAV-80463)**


**Technical information**

<b>Material</b>	Aluminium	<b>Driver</b>	Constant current (CC)	<b>Product colours</b>	Black, White, Matt Silver, Concrete
<b>Light source</b>	10752 LED	<b>Input voltage</b>	220-240 V 50/60 Hz		- Urban, Softscape - Urban, Stone
<b>Power</b>	373 W	<b>Optic</b>	0	- Urban, Corten - Urban, Oak -	Woodland, Walnut - Woodland,
<b>Lumen</b>	14446 lm	<b>Optic value</b>	Opal	Pine - Woodland	
<b>Efficacy</b>	39 lm/W	<b>CCT / CRI</b>	RGBW40	<b>Weight</b>	42.8 kg
<b>Driver option</b>	Integral control gear	<b>Dimming type</b>	Bluetooth	<b>Operating temperature</b>	-20 °C to 40 °C
				<b>Variants (Bluetooth)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

GAV-80463

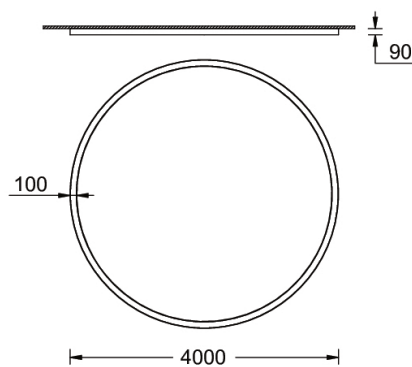

**Accessories**

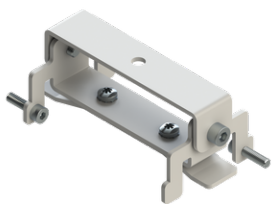

Ceiling-mounting bracket (60 mm profile)  
**A81481**



Xpress wireless switch  
**A90591**



Recessing box  
**A61051**



DALI Control System  
**Control-DALI**