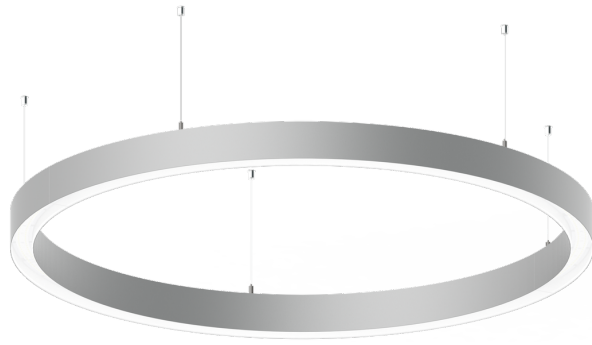


**GAVLE 5** (GAV-90004)**Product description**


Down - 60x90 mm - 500 mm - RGBW DMX

**Luminaire Structure**

- Remote driver (included)

**Optic**

0

**Product colour**01 - Black (RAL  
9011)03 - White (RAL  
9003)05 - Matt Silver  
(RAL 9006)**Special finishes upon request**SU01 - Concrete -  
UrbanSU02 - Softscape -  
UrbanSU03 - Stone -  
UrbanSU04 - Corten -  
UrbanSW01 - Oak -  
WoodlandSW02 - Walnut -  
WoodlandSW03 - Pine -  
Woodland

**GAVLE 5 (GAV-90004)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	384 LED
<b>Power</b>	27 W
<b>Lumen</b>	859 lm
<b>Efficacy</b>	32 lm/W
<b>Driver option</b>	Remote driver (included)

<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	250 mA,
<b>Optic</b>	0
<b>Optic value</b>	102°
<b>CCT / CRI</b>	RGBW30, RGBW40
<b>Dimming type</b>	DMX, DMX/RDM

<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	3.7 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Variants (DMX/RDM)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

**Gavle 500**

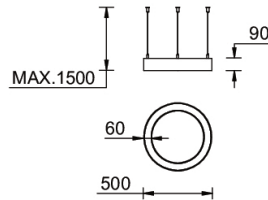

**Accessories**



Recessing box  
**A61051**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**