# GAVLE 5 (GAV-90031)

IP20

## Product description

Down - 60x90 mm - 2000 mm

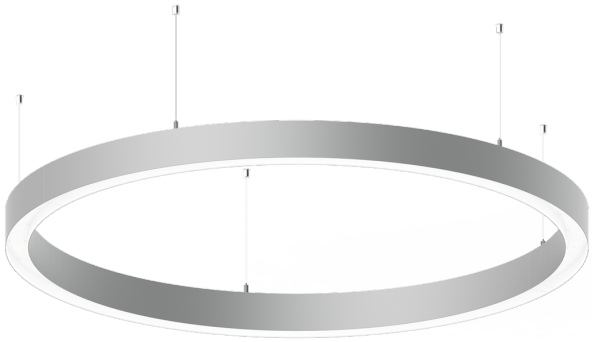

## Luminaire Structure

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Opal PMMA diffuser (UGR <19) for glare control
- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI) for GAV-90001, GAV-90011, GAV-90021, GAV-90031, GAV-90041, GAV-90051, GAV-90061, GAV-90071, GAV-90101, GAV-90111, GAV-90121, GAV-90131, GAV-90141, GAV-90151, GAV-90161, GAV-90171
- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options

## Optic

O

## Product colour

01 - Black (RAL 9011)



03 - White (RAL 9003)

05 - Matt Silver (RAL 9006)

## Special finishes upon request

SU01 - Concrete - Urban

SU02 - Softscape - Urban

SU03 - Stone - Urban

SU04 - Corten - Urban

SW01 - Oak - Woodland

SW02 - Walnut - Woodland

SW03 - Pine - Woodland

We reserve the right to make technical and design changes.

03:52, 23-04-2024

https://www.ligman.com/gavle-5-gav-90031/

**THAILAND**
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
**info@ligman.com**

# GAVLE 5 (GAV-90031)

## Technical information

| | |
|---|---|
| **Material** | Aluminium |
| **Light source** | 768 LED |
| **Power** | 98 W |
| **Lumen** | 9597 - 10018 lm |
| **Efficacy** | 98 - 102 lm/W |
| **Driver option** | Integral control gear for On/Off (-ND), DALI (-DA). Remote driver is included for 1-10V (-DI) |

| | |
|---|---|
| **Driver** | Constant current (CC) |
| **Input voltage** | 220-240 V 50/60 Hz |
| **Optic** | O |
| **Optic value** | Opal |
| **CCT / CRI** | 3000K CRI80, 4000K CRI80 |
| **Dimming type** | On/Off, 1-10V, DALI |

| | |
|---|---|
| **Product colours** | Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland |
| **Weight** | 16.4 kg |
| **Operating temperature** | -20 °C to 40 °C |
| **Variants (On/Off, 1-10V, DALI)** | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

GAV-90031

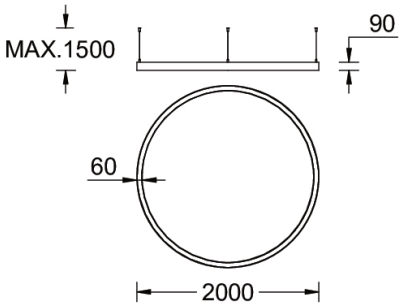


## Accessories



Supply cable surface mounting box
**A80981**

Xpress wireless switch
**A90591**



Wireless bluetooth converter
**A90291**

DALI Control System
**Control-DALI**

We reserve the right to make technical and design changes.



**THAILAND**
LIGMAN Lighting Co.,Ltd.
17/2 Moo 4, Monthong, Bang Nam Priao,
24150 Chachoengsao - Thailand
**info@ligman.com**