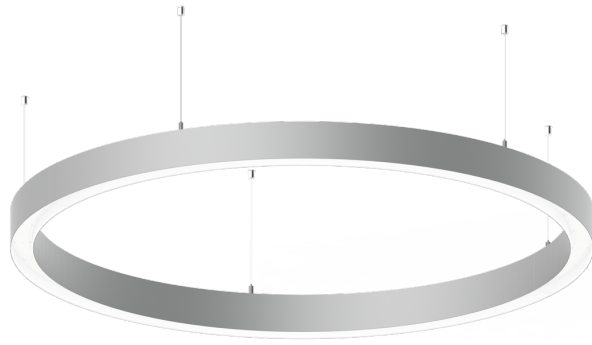


GAVLE 5 (GAV-90102)**Product description**

Down (Optic) & Up (Optic 2nd) - 60x100 mm - 500 mm
- TW

**Luminaire Structure**

- Integral control gear

Optic


0

Product colour

01 - Black (RAL
9011)

03 - White (RAL
9003)

05 - Matt Silver
(RAL 9006)

Special finishes upon request

SU01 - Concrete -
Urban

SU02 - Softscape -
Urban

SU03 - Stone -
Urban

SU04 - Corten -
Urban



SW01 - Oak -
Woodland



SW02 - Walnut -
Woodland



SW03 - Pine -
Woodland

GAVLE 5 (GAV-90102)


Technical information

Material	Aluminium
Light source	288 & 288 LED
Power	52 W
Lumen	5195 lm
Efficacy	100 lm/W
Driver option	Integral control gear


Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	0
Optic value	102°
CCT / CRI	TW (2700K - 6500K)
Dimming type	DALI

Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	4.7 kg
Operating temperature	-20 °C to 40 °C
Variants (DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)

Gavle 500

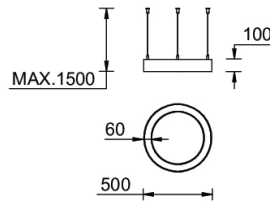


Accessories



Supply cable surface mounting box
A80981



Xpress wireless switch
A90591



Wireless bluetooth converter
A90291



DALI Control System
Control-DALI