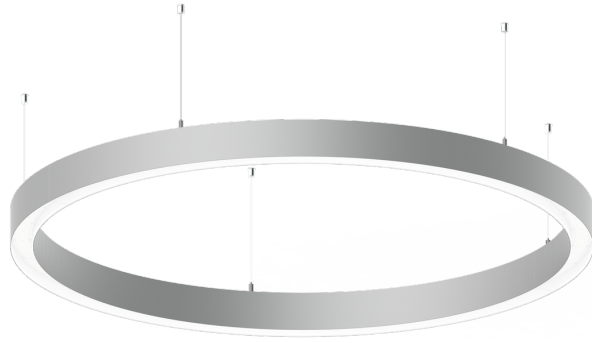


**GAVLE 6** (GAV-90202)**Product description**


Down - 100x90 mm - 500 mm - TW

**Luminaire Structure**

- Remote driver (included)

**Optic**

0

**Product colour**01 - Black (RAL  
9011)03 - White (RAL  
9003)05 - Matt Silver  
(RAL 9006)**Special finishes upon request**SU01 - Concrete -  
UrbanSU02 - Softscape -  
UrbanSU03 - Stone -  
UrbanSU04 - Corten -  
UrbanSW01 - Oak -  
WoodlandSW02 - Walnut -  
WoodlandSW03 - Pine -  
Woodland

**GAVLE 6 (GAV-90202)**


**Technical information**

<b>Material</b>	Aluminium
<b>Light source</b>	576 LED
<b>Power</b>	37 W
<b>Lumen</b>	4125 lm
<b>Efficacy</b>	111 lm/W
<b>Driver option</b>	Remote driver (included)


<b>Driver</b>	Constant current (CC)
<b>Input voltage</b>	500 mA,
<b>Optic</b>	0
<b>Optic value</b>	102°
<b>CCT / CRI</b>	TW (2700K - 6500K)
<b>Dimming type</b>	DALI

<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Weight</b>	4.3 kg
<b>Operating temperature</b>	-20 °C to 40 °C
<b>Variants (DALI)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)


**Gavle 500**

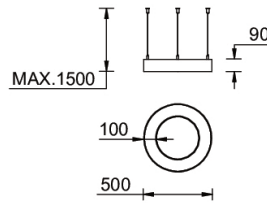

**Accessories**

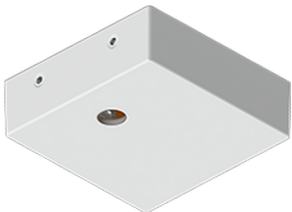

Supply cable surface mounting box  
**A80981**



Wireless bluetooth converter  
**A90291**



Xpress wireless switch  
**A90591**



DALI Control System  
**Control-DALI**