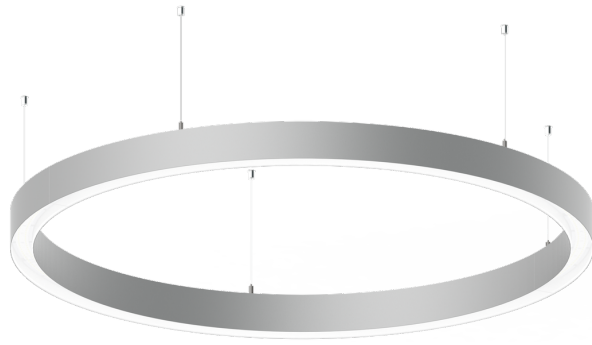


**GAVLE 6** (GAV-90203)**Product description**


Down - 100x90 mm - 500 mm - RGBW

**Luminaire Structure**

- Remote driver (included)

**Optic**

0


**Product colour**01 - Black (RAL  
9011)03 - White (RAL  
9003)05 - Matt Silver  
(RAL 9006)**Special finishes upon request**SU01 - Concrete -  
UrbanSU02 - Softscape -  
UrbanSU03 - Stone -  
UrbanSU04 - Corten -  
UrbanSW01 - Oak -  
WoodlandSW02 - Walnut -  
WoodlandSW03 - Pine -  
Woodland

**GAVLE 6** (GAV-90203)


**Technical information**

<b>Material</b>	Aluminium	<b>Driver</b>	Constant current (CC)	<b>Product colours</b>	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
<b>Light source</b>	1152 LED	<b>Input voltage</b>	250 mA,	<b>Weight</b>	4.3 kg
<b>Power</b>	41 W	<b>Optic</b>	0	<b>Operating temperature</b>	-20 °C to 40 °C
<b>Lumen</b>	1444 lm	<b>Optic value</b>	Opal	<b>Variants (Bluetooth)</b>	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
<b>Efficacy</b>	35 lm/W	<b>CCT / CRI</b>	RGBW40		
<b>Driver option</b>	Remote driver (included)	<b>Dimming type</b>	Bluetooth		

Gavle 500

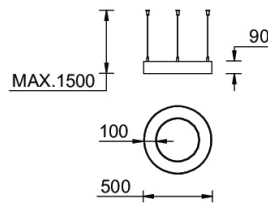

**Accessories**

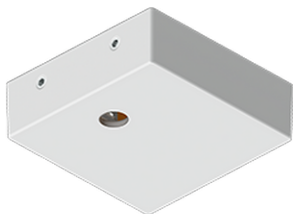

Supply cable surface mounting box  
**A80981**



Xpress wireless switch  
**A90591**



Recessing box  
**A61051**



DALI Control System  
**Control-DALI**