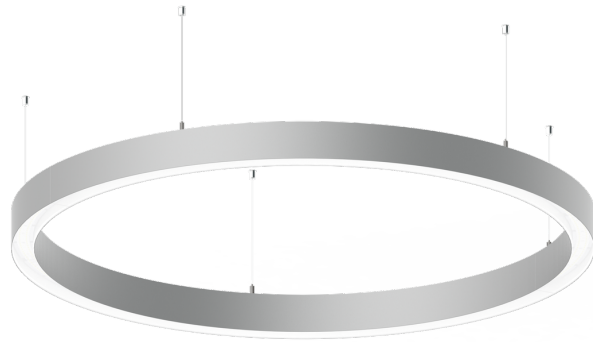


GAVLE 6 (GAV-90211)**Product description**



Down - 100x90 mm - 1000 mm

**Luminaire Structure**

- Integral control gear

Optic

0

Product colour01 - Black (RAL
9011)03 - White (RAL
9003)05 - Matt Silver
(RAL 9006)**Special finishes upon request**SU01 - Concrete -
UrbanSU02 - Softscape -
UrbanSU03 - Stone -
UrbanSU04 - Corten -
UrbanSW01 - Oak -
WoodlandSW02 - Walnut -
WoodlandSW03 - Pine -
Woodland

GAVLE 6 (GAV-90211)


Technical information

Material	Aluminium
Light source	672 LED
Power	86 W
Lumen	9497 - 9913 lm
Efficacy	110 - 115 lm/W
Driver option	Integral control gear


Driver	Constant current (CC)
Input voltage	220-240 V 50/60 Hz
Optic	0
Optic value	Opal
CCT / CRI	3000K CRI80, 4000K CRI80
Dimming type	On/Off, 1-10V, DALI

Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Weight	9.8 kg
Operating temperature	-20 °C to 40 °C
Variants (On/Off, 1-10V, DALI)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)


Gavle 1000

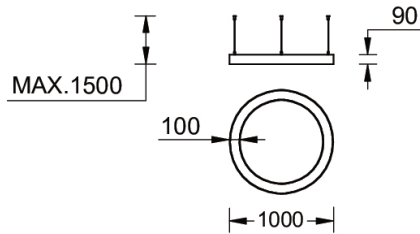

Accessories

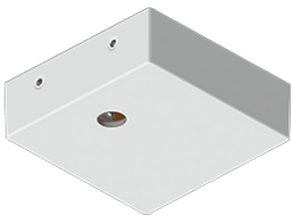

Supply cable surface mounting box
A80981



Wireless bluetooth converter
A90291



Xpress wireless switch
A90591



DALI Control System
Control-DALI