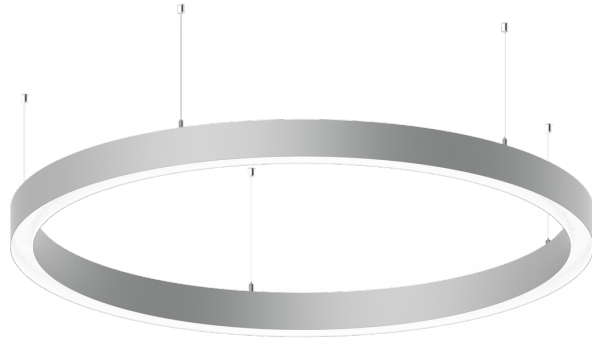


GAVLE 6 (GAV-90213)**Product description**



Down - 100x90 mm - 1000 mm - RGBW

**Luminaire Structure**

- Remote driver (included)

Optic

0


Product colour01 - Black (RAL
9011)03 - White (RAL
9003)05 - Matt Silver
(RAL 9006)**Special finishes upon request**SU01 - Concrete -
UrbanSU02 - Softscape -
UrbanSU03 - Stone -
UrbanSU04 - Corten -
UrbanSW01 - Oak -
WoodlandSW02 - Walnut -
WoodlandSW03 - Pine -
Woodland

GAVLE 6 (GAV-90213)


Technical information

Material	Aluminium	Driver	Constant current (CC)	Product colours	Black, White, Matt Silver, Concrete - Urban, Softscape - Urban, Stone - Urban, Corten - Urban, Oak - Woodland, Walnut - Woodland, Pine - Woodland
Light source	2688 LED	Input voltage	500 mA,	Weight	9.3 kg
Power	93 W	Optic	0	Operating temperature	-20 °C to 40 °C
Lumen	3470 lm	Optic value	Opal	Variants (Bluetooth)	Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0)
Efficacy	37 lm/W	CCT / CRI	RGBW40		
Driver option	Remote driver (included)	Dimming type	Bluetooth		

Gavle 1000

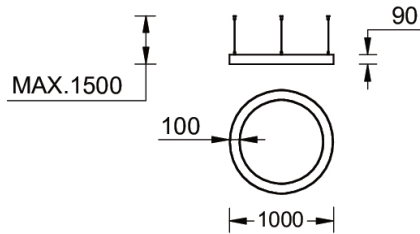

Accessories

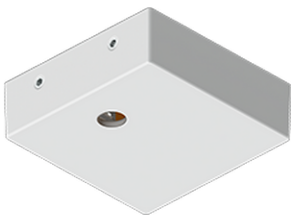

Supply cable surface mounting box
A80981



Xpress wireless switch
A90591



Recessing box
A61051



DALI Control System
Control-DALI