

GAVLE 6 (GAV-90214)**Product description**


Down - 100x90 mm - 1000 mm - RGBW DMX

**Luminaire Structure**

- Remote driver (included)

Optic

0


Product colour01 - Black (RAL
9011)03 - White (RAL
9003)05 - Matt Silver
(RAL 9006)**Special finishes upon request**SU01 - Concrete -
UrbanSU02 - Softscape -
UrbanSU03 - Stone -
UrbanSU04 - Corten -
UrbanSW01 - Oak -
WoodlandSW02 - Walnut -
WoodlandSW03 - Pine -
Woodland

GAVLE 6 (GAV-90214)

Technical information

| | | | | | |
|----------------------|--------------------------|----------------------|-----------------------|--------------------------------|---|
| Material | Aluminium | Driver | Constant current (CC) | Product colours | Black, White, Matt Silver, Concrete |
| Light source | 2688 LED | Input voltage | 500 mA, | | - Urban, Softscape - Urban, Stone |
| Power | 93 W | Optic | 0 | - Urban, Corten - Urban, Oak - | Woodland, Walnut - Woodland, |
| Lumen | 3470 lm | Optic value | 102° | Pine - Woodland | |
| Efficacy | 37 lm/W | CCT / CRI | RGBW30, RGBW40 | Weight | 9.3 kg |
| Driver option | Remote driver (included) | Dimming type | DMX, DMX/RDM | Operating temperature | -20 °C to 40 °C |
| | | | | Variants (DMX/RDM) | Compatible with EN/ IEC 60598-2-22: Suitable for emergency installations as central supply, non-maintained (Z0) |

Gavle 1000

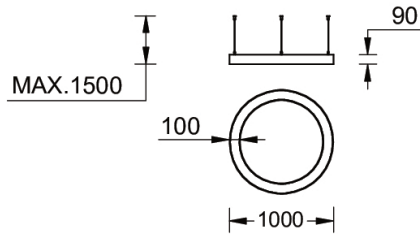

Accessories



Recessing box
A61051



DMX Control System
Control-DMX



DMX/RDM Control System
Control-DMX-RDM