

**GAVLE 6** (GAV-90274)



**Product description**

Down - 100x90 mm - 5000 mm - RGBW DMX



**Luminaire Structure**

- Extruded aluminium bended profile with powder coating
- Stainless steel fasteners in grade 316
- Stainless steel, adjustable, suspension (1.5 m) complete with electrical wires in white for mounting
- Opal PMMA diffuser (UGR <19) for glare control

- Up and down light distribution options
- Passive thermal management
- Integral control gear
- Remote driver is included for dimming type: 1-10V (-DI) for GAV-90001, GAV-90011, GAV-90021, GAV-90031, GAV-90041, GAV-90051, GAV-90061, GAV-90071, GAV-90101, GAV-90111, GAV-90121, GAV-90131, GAV-90141, GAV-90151, GAV-90161, GAV-90171

- Wireless control available through Bluetooth connection
- Daylight and occupancy sensor options

**Optic**




0

**Product colour**




01 - Black (RAL 9011)    03 - White (RAL 9003)    05 - Matt Silver (RAL 9006)

**Special finishes upon request**



SU01 - Concrete - Urban    SU02 - Softscape - Urban    SU03 - Stone - Urban    SU04 - Corten - Urban



SW01 - Oak - Woodland    SW02 - Walnut - Woodland    SW03 - Pine - Woodland

**GAVLE 6 (GAV-90274)**


**Technical information**

|                      |                       |
|----------------------|-----------------------|
| <b>Material</b>      | Aluminium             |
| <b>Light source</b>  | 13824 LED             |
| <b>Power</b>         | 480 W                 |
| <b>Lumen</b>         | 18957 lm              |
| <b>Efficacy</b>      | 39 lm/W               |
| <b>Driver option</b> | Integral control gear |

|                      |                       |
|----------------------|-----------------------|
| <b>Driver</b>        | Constant current (CC) |
| <b>Input voltage</b> | 220-240 V 50/60 Hz    |
| <b>Optic</b>         | 0                     |
| <b>Optic value</b>   | 102°                  |
| <b>CCT / CRI</b>     | RGBW30, RGBW40        |
| <b>Dimming type</b>  | DMX, DMX/RDM          |

|                              |   |
|------------------------------|---|
| <b>Product colours</b>       | Black, White, Matt Silver, Concrete<br>- Urban, Softscape - Urban, Stone<br>- Urban, Corten - Urban, Oak -<br>Woodland, Walnut - Woodland,<br>Pine - Woodland |
| <b>Weight</b>                | 51.5 kg   |
| <b>Operating temperature</b> | -20 °C to 40 °C   |
| <b>Variants (DMX/RDM)</b>    | Compatible with EN/ IEC<br>60598-2-22: Suitable for<br>emergency installations as<br>central supply, non-maintained<br>(Z0)                                   |

GAV-90274

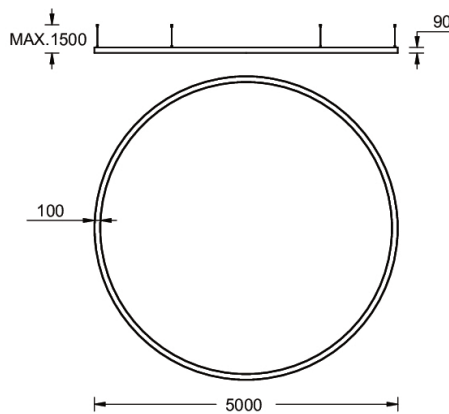

**Accessories**



Recessing box  
**A61051**



DMX Control System  
**Control-DMX**



DMX/RDM Control System  
**Control-DMX-RDM**